

Technical Data Sheet

CODE 70904

EASY DRY AUTO

Automatic and manual hair and hand dryers



IMQ



IMQ




CE

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	8	Weight (Kg)	3,1
Absorbed Power max (W)	1800	! "ŠŇÛč 'ææf ß- íßä 'ææf mÍ'ç	16
Frequency (Hz)	50/60	Delivery max (l/s)	37,5
Insulation Class	II°	Delivery max (m³/h)	190
IP	X4	Power in stand-by mode (W)	0,49
Motor Power (W)	70/85	Sound pressure level Lp [dB (A)] 1m	61
Shock resistance rating (IK)	09	Tempo asciugatura (s)	22
Voltage (V)	220-240	Velocità aria (km/h)	58

DIMENSIONS

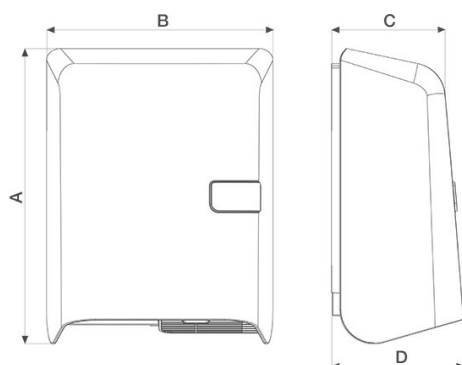

Size A (mm)	346
Size B (mm)	265
Size C (mm)	133
Size D (mm)	155

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 70904

EASY DRY AUTO

Automatic and manual hair and hand
dryers



DESCRIPTION

- Front cover made of shockproof, UV-resistant plastic (ABS); closure system with allen screw.
væbS Nbl æ [U]½%gæj'f' |æ%æ» ææ- l.½'oe'l... 'U%æ'ŠU'A%ææææ æssæ
ZUcæS...S%æææ [b] |æ|ce n%æ-æS [U]½%gæj'f' %æb'-æ' Šæ'f' ms.æ
- Induction motor with thermal overload cutout, coupled to centrifugal impeller.
K'u |ß»æ-A ææS-'næß-'U'ï
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Dryer operated automatically by an infrared device with activation distance of up to 35 cm, selected by means of an internal trimmer adjustable at the moment of installation. Appliance shuts down automatically in the event of the sensor being obstructed intentionally or accidentally, after 10' continuous operation.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com