

# Technical Data Sheet

CODE 70925

## VORT FOHN 1600 PLUS .

Gun-type hair dryers



### Certifications



CE



TUV




EAC

### TECHNICAL AND PERFORMANCE DATA

|                          |      |                                     |     |
|--------------------------|------|-------------------------------------|-----|
| Absorbed Current max (A) | 6,95 | Motor Power (W)                     | 20  |
| Absorbed Power max (W)   | 1600 | Voltage (V)                         | 230 |
| Frequency (Hz)           | 50   | Delivery max (l/s)                  | 25  |
| Insulation Class         | II°  | Delivery max (m <sup>3</sup> /h)    | 90  |
| IP                       | X0   | Sound pressure level Lp [dB (A)] 1m | 69  |

### DIMENSIONS

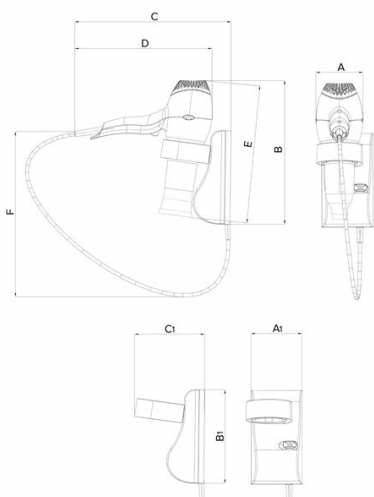

|                    |     |
|--------------------|-----|
| Dimensione A1 (mm) | 100 |
| Dimensione C1 (mm) | 140 |
| Size A (mm)        | 110 |
| Size B (mm)        | 290 |
| Size B1 (mm)       | 180 |
| Size C (mm)        | 290 |
| Size D (mm)        | 276 |
| Size E (mm)        | 265 |
| Size F (mm)        | 520 |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 70925

## VORT FOHN 1600 PLUS .

Gun-type hair dryers



---

### DESCRIPTION

- Dryer casing moulded in self-extinguishing ABS plastic (rated V0).
- ABS wall mounting bracket.
- Nozzle moulded in self-extinguishing glass-fibre reinforced nylon rated V0.
- Commutator motor with thermal overload protection.
- Heating element protected by thermal overload limiter with automatic reset.
- Automatic shutoff on releasing button.
- 3 power settings for the 2 speeds available.
- Selectable power levels from 750 to 1600 W.
- Equipped with razor sockets wired for 230 V / 50 Hz and 120 V / 60 Hz power supply. Main on/off switch incorporated into wall mounting bracket.
- Air flow 90 m3/h.
- Dust filter.
- TUV safety certification

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)