

Technical Data Sheet

CODE 19226

OPTIMAL DRY

Automatic and manual hand dryers



Certifications



IMQ



CE



CCC




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	9	Weight (Kg)	2,6
Absorbed Power max (W)	2000	Airflow speed at max speed (m/s)	14
Frequency (Hz)	50/60	Delivery max (l/s)	47
Insulation Class	II°	Delivery max (m³/h)	220
IP	X4	Power in stand-by mode (W)	0,4060
Motor Power (W)	65	Sound pressure level Lp [dB (A)] 1m	61,4
Shock resistance rating (IK)	09	Tempo asciugatura (s)	25
Voltage (V)	220-240	Velocità aria (km/h)	50

DIMENSIONS

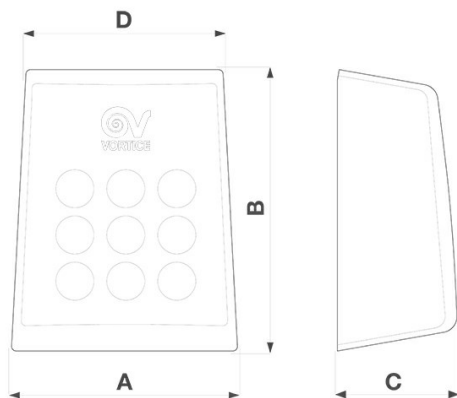

Size A (mm)	253
Size B (mm)	319
Size C (mm)	137
Size D (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19226

OPTIMAL DRY

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 170 m³/h.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range 20"-60". Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- Dust filter.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com