

Technical Data Sheet

CODE 19229

OPTIMAL DRY A

Automatic and manual hand dryers



Certifications



IMQ



CE



C Tick Mark



CCC




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	9	Shock resistance rating (IK)	09
Absorbed Power max (W)	2000	Voltage (V)	220-240
Frequency (Hz)	50/60	Weight (Kg)	2,6
Insulation Class	II°	Delivery max (l/s)	47
IP	X4	Delivery max (m ³ /h)	170
Motor Power (W)	65	Power in stand-by mode (W)	0,4550
		Sound pressure level Lp [dB (A)] 1m	61,4

DIMENSIONS

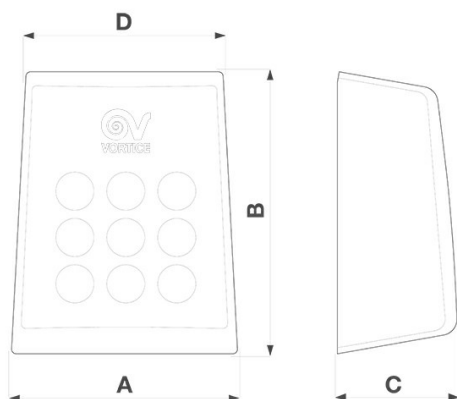

Size A (mm)	253
Size B (mm)	319
Size C (mm)	137
Size D (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19229

OPTIMAL DRY A

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 170 m³/h.
- Dryer operated automatically by an infrared device with activation distance of up to 35 cm, selected by means of an internal trimmer adjustable at the moment of installation. Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- Dust filter.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com