

Technical Data Sheet


CODE 61756

NORDIK EVOLUTION R 120/48" NERO

Reversible ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Delivery max (m ³ /h)	13810
Insulation Class	I°	Delivery max (m ³ /min)	230,17
Voltage (V)	220-240	RPM	198
Airflow speed at max speed (m/s)	2,36	Service value (m ³ /min)/W	3,288
		Sound power level Lw [dB(A)]	49,1

DIMENSIONS

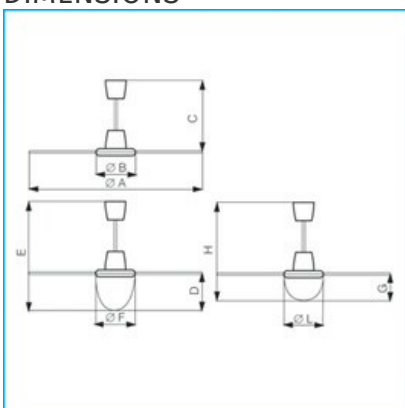

Etichetta Energetica	NO
Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61756

NORDIK EVOLUTION R 120/48" NERO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour black.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour black.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour black, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
 - with lamp rated 105 W max, E27 screw fitting
 - with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION
LIGHT KIT
Code 22413



EVOLUTION
LIGHT KIT ES
Code 22414



SCRR5
Code 12963



SCRR5L
Code 12964

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com