

# Technical Data Sheet

CODE 45330

## VORT QBK POWER 630 1V 5,5

Belt driven cabinet fans



### Certifications



CE




EAC

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	400/690
Motor IP protection	55	Delivery max (l/s)	3500
Nominal Current (A)	11,03	Delivery max (m³/h)	27000
Nominal Power (W)	5500	RPM max	600
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	78

### DIMENSIONS

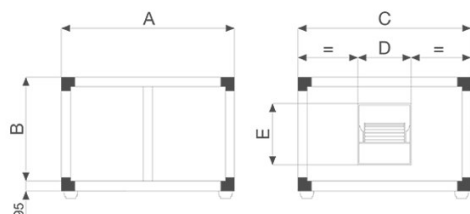

Size A (mm)	1540
Size B (mm)	1540
Size C (mm)	1540
Size D (mm)	720
Size E (mm)	720

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 45330

## VORT QBK POWER 630 1V 5,5



Belt driven cabinet fans

### DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 27,000 m<sup>3</sup>/h.

### ACCESSORIES



**QBK RRC  
POWER 630  
(TETTUCCIO)**

Code 24221



**QBK VCD  
POWER 630  
(SERRANDA+COMANDO+RAZIONAMENTO)**

Code 24228



**QBK IG POWER  
630 (GRIGLIA)**

Code 24236



**QBK SS POWER  
(MICRO)**

Code 24237



**QBK VDP  
POWER 560-  
630  
(PULEGGIA)**

Code 24239



**QBK FS POWER  
630 (SEZIONE  
FILTRANTE)**

Code 24246

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)