

Technical Data Sheet

CODE 70221

CALDORE RT

Portable and wall-mounted convector and fan heaters




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Control with operating time limitation	NO
Insulation class	II°	Control with remote option	NO
Max absorbed current (A)	8,7	Min thermal power - PMin (kW)	0,8
Max absorbed power (W)	2000	Nominal thermal power - Pnom (kW)	2
Max absorbed power at Max speed (W)	2000	Pilot flame storage appliances	no
Voltage (V)	230	Room temperature control with open window detection	NO
Weight (Kg)	5,3	Room temperature control with presence detection	NO
Adaptive starting control	NO	Seasonal energy efficiency (%)	36
Appliances with stand-by mode	no	Single phase heating output without room temperature control	NO
Auxiliary electricity consumption at Min heating output - elmin (kW)	0,018	Thermal power with electronic control of the room temperature	NO
Auxiliary electricity consumption at nominal heating output - elmax (kW)	0,018	Thermal power with electronic control of the room temperature and daily timer	NO
Auxiliary electricity consumption in stand-by - eLSB (kW)	0,018	Thermal power with electronic control of the room temperature and weekly timer	NO
Continuous thermal power - Pmax, C (kW)	2	Thermal power with room temperature control by mechanical thermostat	SI
Control with black globe thermometer	NO	Thermal power with two or more manual phases without room temperature control	NO

DIMENSIONS

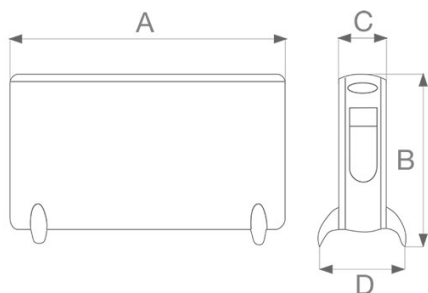

Size A (mm)	685
Size B (mm)	415
Size C (mm)	200
Size D (mm)	100

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 70221

CALDORE RT

Portable and wall-mounted convector and fan heaters



DESCRIPTION

- Front and rear panels, top and bottom grilles made of steel with scratch-resistant paint finish, colour grey.
- Flanks made of self-extinguishing plastic rated V0, colour grey.
- 3-speed shaded pole motor with thermal overload protection, shaft turning in self-aligning and self-lubricating bushings and coupled to a centrifugal rotor moulded from thermoplastic resin.
- Heating element protected by limiter with PTC sensor, manual reset.
- Luminous switches for on/off control and selection of the 3 heat output settings (800/1200/2000 W).
- Manually adjustable room thermostat with antifreeze function guaranteeing automatic activation of the heater whenever ambient temperature drops below 5 °C.
- Adjustable 24-hour timer for programming on and off periods, minimum divisions of 15'.
- PVC power cord with moulded plug.
- Built-in recoil cord winder.
- 4 stabilizer feet with special non-slip rubber pads.
- IMQ safety certification.

ACCESSORIES



CRONOTERMOSTATO DIGITALE DA SPINA

Code 21378

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com