

# Technical Data Sheet

CODE 11321

## M 120/5" A

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC



EAC



G-Mark




UKCA

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12	Ø Discharge Hole (mm)	119
Absorbed Power max (W)	20	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	0,8
Inlet	Automatico	Delivery max (l/s)	48,6
Insulation Class	II°	Delivery max (m³/h)	175
IP	X4	Pressure max (mmH2O)	4,5
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	44
Nominal Diameter (mm)	120	RPM	2100
		Sound Pressure level Lp [dB (A)] 3m	39,5

### DIMENSIONS

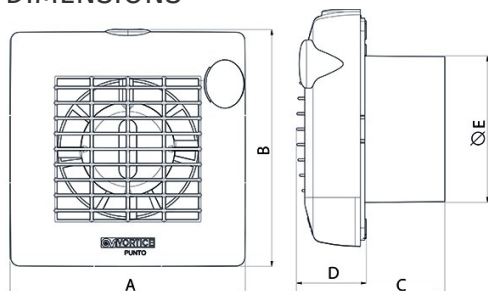

Size A (mm)	179
Size B (mm)	181
Size C (mm)	110
Size D (mm)	47
Size E (mm)	Ø 119

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 11321

## M 120/5" A


Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m<sup>3</sup>/h.
- Equipped with system by which the louvres of the grille are opened and closed automatically.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

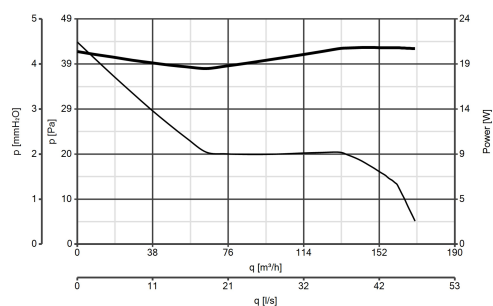

### ACCESSORIES



**F 120/5"**  
Code 22132



**S 120/5**  
Code 22155



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**  
Code 12966



**SCNRB**  
**SCAT.COM.NON**  
**REV.INCASSO**  
Code 12971



**KIT SCB**  
**(TRASF.E.C.)**  
Code 22481

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com