

Technical Data Sheet

CODE 12612

VORTICE 150/6" AR

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

| | | | |
|--|------------|-------------------------------------|---------|
| Absorbed Current max (A) | 0,11 | Voltage (V) | 220-240 |
| Absorbed Power max (W) | 25 | Weight (Kg) | 2,07 |
| Frequency (Hz) | 50-60 | Delivery max - Extract (l/s) | 65,3 |
| Inlet | Automatico | Delivery max - Extract (m3/h) | 235 |
| Insulation Class | II° | Delivery max - Intake (l/s) | 41,7 |
| IP | X4 | Delivery max - Intake (m3/h) | 150 |
| Max absorbed Power at 60Hz (W) | 25 | Delivery max (m³/h) | 235 |
| Max ambient temperature for continuous operation (°C) | 50 | RPM | 1340 |
| Max ambient temperature for continuous operation 60Hz (°C) | 50 | Rpm - Exhaust | 1340 |
| Ø Discharge Hole (mm) | 150 | Rpm - Supply | 2040 |
| | | Sound Pressure level Lp [dB (A)] 3m | 37,5 |

DIMENSIONS

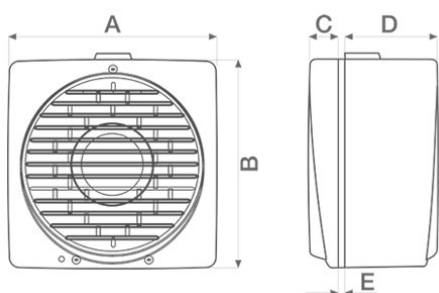

| | |
|--------------|---------|
| Ø glass hole | 185/190 |
| Ø wall hole | 185/190 |
| Size A (mm) | 215 |
| Size B (mm) | 218 |
| Size C (mm) | 31 |
| Size D (mm) | 97,5 |
| Size E (mm) | 2/38 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12612

VORTICE 150/6" AR

Wall/window axial fans




DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

□

ACCESSORIES



KIT TE 150/6" (TORRETTA)

Code 13001



KIT MU (MURO)

Code 13018



KIT WV 150/6" (DOPPI VETRI)

Code 13021



KIT FF 150/6" (DOPPIA FINESTRA)

Code 13024



CR5N

Code 12941




CREN

Code 12944



C PIR

Code 12998



C TIMER

Code 12999



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com



KIT TC 150/6"
(TETTO CON
CONDOTTO)

Code 13027