

Technical Data Sheet

CODE 61041

NORDIK AIR DESIGN 180-29 BIANCO

Reversible ceiling fans




Certifications


TECHNICAL AND PERFORMANCE DATA

| | | | |
|--------------------------|---------|---------------------------------------|--------|
| Absorbed Current max (A) | 0,54 | Weight (Kg) | 10,2 |
| Absorbed Power max (W) | 115 | Airflow speed at max speed (m/s) | 1,42 |
| Blades diameter | 1800 | Delivery max (m ³ /h) | 16500 |
| Frequency (Hz) | 50 | Delivery max (m ³ /min) | 275,00 |
| Insulation Class | I° | RPM | 148 |
| Voltage (V) | 220-240 | Service value (m ³ /min)/W | 2,391 |
| | | Sound power level Lw [dB(A)] | 48,9 |

DIMENSIONS

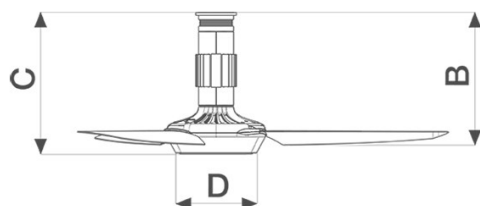

| | |
|-------------|-------|
| Size A (mm) | ∅ |
| | 1800 |
| Size B (mm) | 520 |
| Size C (mm) | 545 |
| Size D (mm) | ∅ 300 |

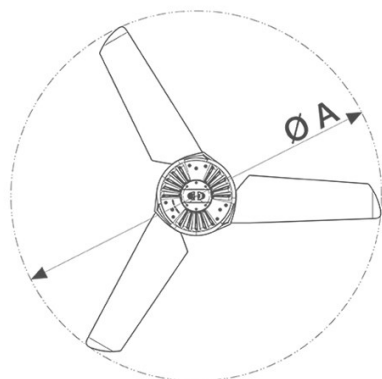

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61041

NORDIK AIR DESIGN 180-29 BIANCO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades: 1800 mm
- Cups, motor cover and ceiling rod casing made of matt white thermoplastic resin (Polycarbonate).
- Ball bearings external rotor motor. Reversible rotation.
- 3 carbon fiber made blades, airfoil shaped.
- Rod made of electrogalvanized steel, length 290 mm.
- Lighting system based on LED technology (color temperature 3.500 °K), 3 different lighting modes available:
 - home: this option activates 60 LED placed on the central area of the ceiling light. The entire underneath area is covered by a diffused and uniform light (maximum surface 30 m²).
 - work ("dark light"): the option activates 50 LED placed on the outer ring of the ceiling light. A small area is illuminated avoiding risks of glare.
 - mixed: all 110 LED are activated; the entire area is illuminated. The light intensity can be adjusted to achieve the required intensity illumination.
- Remote control (RF technology); supplied with the product, allows to:
 - Switch ON/OFF the product;
 - Set the rotation speed (5 speeds available);
 - Set the rotation sense (cw or ccw);
 - Switch ON/OFF the light and set 3 alternative lighting modes;
 - Adjust the light intensity (5 levels available);
 - Set the delayed shutdown of the ceiling fan (timer).
- Safety cable to prevent any risk of fall in case of improper installation.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com