

# Technical Data Sheet

CODE 61733

## NORDIK EVOLUTION R 120/48" ORO BIANCO

Reversible ceiling fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,34	Weight (Kg)	7,1
Absorbed Power max (W)	70	Airflow speed at max speed (m/s)	2,36
Blades diameter	1284	Delivery max (m <sup>3</sup> /h)	13810
Frequency (Hz)	50	Delivery max (m <sup>3</sup> /min)	230,17
Insulation Class	I°	RPM	198
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	3,288
		Sound power level Lw [dB(A)]	49,1

### DIMENSIONS

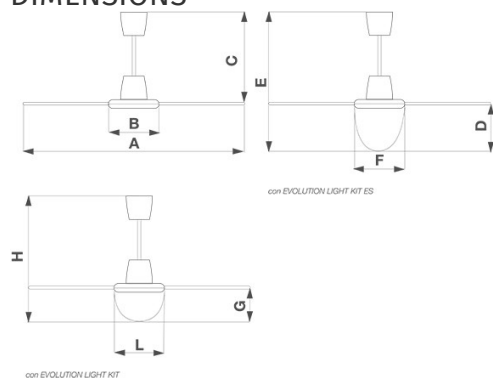

Size A (mm)	1284
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 61733

## NORDIK EVOLUTION R 120/48" ORO BIANCO



Reversible ceiling fans

### DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), "metal looking" mirror finish, colour WHITE GOLD.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m3/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour WHITE GOLD.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour WHITE GOLD, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Possibility of automatic adjustment up to 16 fans simultaneously, in relation to the differential measured by two temperature sensors (VORT DELTA T optional).
- Factory-prepared to accept 2 specific optional light kits:
  - ? with lamp rated 105 W max, E27 screw fitting
  - ? with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

### ACCESSORIES



#### EVOLUTION LIGHT KIT

Code 22413



#### ASTA NK I 200 ORO BIANCO

Code 22681



#### ASTA NK I 250 ORO BIANCO

Code 22682



#### ASTA NK I 350 ORO BIANCO

Code 22683



#### ASTA NK I 500 ORO BIANCO

Code 22684



#### ASTA NK I 750 ORO BIANCO

Code 22685



#### ASTA NK I 1000 ORO BIANCO

Code 22686



#### SET PALE NK EVOLUTION R 120/48" ORO B.

Code 22676  
PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302



#### SC 503 B

Code 12801



#### SC EXT B

Code 12803



#### SCNR5 UNIF.X NK SOFFITTO

Code 12955





**SCRR5**  
Code 12963



**SCRR/M**  
Code 12965



**VORT DELTA T**  
Code 13039



**EVOLUTION  
LIGHT KIT ES**  
Code 22414



**KIT  
SCBRR5/5L/M**  
Code 22489



**TELENORDIK  
5TR**  
Code 22386