

Technical Data Sheet

CODE 61734

NORDIK EVOLUTION R 140/56" ORO BIANCO

Reversible ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,35	Weight (Kg)	7,1
Absorbed Power max (W)	70	Airflow speed at max speed (m/s)	2,08
Blades diameter	1488	Delivery max (m ³ /h)	16586
Frequency (Hz)	50	Delivery max (m ³ /min)	276,43
Insulation Class	I°	RPM	197
Voltage (V)	220-240	Service value (m ³ /min)/W	3,949
		Sound power level Lw [dB(A)]	52,6

DIMENSIONS

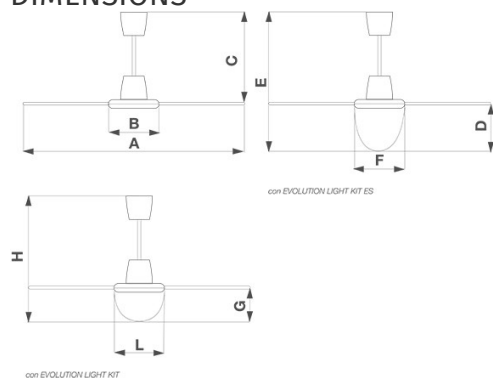

Size A (mm)	1488
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61734

NORDIK EVOLUTION R 140/56" ORO BIANCO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1400 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), "metal looking" mirror finish, colour WHITE GOLD.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 16586 m3/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour WHITE GOLD.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour WHITE GOLD, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Possibility of automatic adjustment up to 16 fans simultaneously, in relation to the differential measured by two temperature sensors (VORT DELTA T optional).
- Factory-prepared to accept 2 specific optional light kits:
 - ? with lamp rated 105 W max, E27 screw fitting
 - ? with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



SC 503 B

Code 12801



SC EXT B

Code 12803



SCNR5 UNIF.X NK SOFFITTO

Code 12955



SCRR5

Code 12963



SCRR/M

Code 12965



VORT DELTA T

Code 13039



TELENORDIK 5TR

Code 22386



EVOLUTION LIGHT KIT

Code 22413



EVOLUTION LIGHT KIT ES

Code 22414



KIT SCBRR5/5L/M

Code 22489



SET PALE NK EVOLUTION R 140/56" ORO

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti),

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

le 22677



ASTA NK I 200
ORO BIANCO

Code 22681



ASTA NK I 250
ORO BIANCO

Code 22682



ASTA NK I 350
ORO BIANCO

Code 22683



ASTA NK I 500
ORO BIANCO

Code 22684



ASTA NK I 750
ORO BIANCO

Code 22685



ASTA NK I 1000
ORO BIANCO

Code 22686