

# Technical Data Sheet

CODE 61751

## NORDIK EVOLUTION R 120/48" BIANCO

Reversible ceiling fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,34	Weight (Kg)	7,1
Absorbed Power max (W)	70	Airflow speed at max speed (m/s)	2,36
Blades diameter	1284	Delivery max (m <sup>3</sup> /h)	13810
Frequency (Hz)	50	Delivery max (m <sup>3</sup> /min)	230,17
Insulation Class	I°	RPM	198
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	3,288
		Sound power level Lw [dB(A)]	49,1

### DIMENSIONS

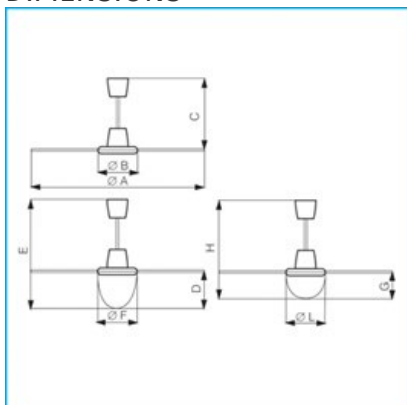

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 61751

## NORDIK EVOLUTION R 120/48" BIANCO



Reversible ceiling fans

### DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m<sup>3</sup>/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
  - ? with lamp rated 105 W max, E27 screw fitting
  - ? with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

### ACCESSORIES



#### EVOLUTION LIGHT KIT ES

Code 22414



#### EVOLUTION LIGHT KIT

Code 22413



#### SCRR5

Code 12963



#### SCRR/M

Code 12965



#### KIT SCBRR5/5L/M

Code 22489



#### SC 503 B

Code 12801



#### SC 503 N

Code 12802



#### SC EXT B

Code 12803



#### SCI503

Code 22461



#### PSC-W

Code 22462



#### PSC-B

Code 22463

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)





**SCRR5L**

Code 12964



**ASTA NK I 200**

**BIANCA**

Code 22032



**ASTA NK I 250**

**BIANCA**

Code 22033



**ASTA NK I 350**

**BIANCA**

Code 22042



**ASTA NK I 500**

**BIANCA**

Code 22051



**ASTA NK I 750**

**BIANCA**

Code 22074

**ASTA NK I 1000**

**BIANCA**

Code 22077

**TELENORDIK**

**5TR**

Code 22386

**SET PALE NK I  
PLUS 120/48  
BIANCO INT**

Code 22632