

# Technical Data Sheet

CODE 61752

## NORDIK EVOLUTION R 140/56" BIANCO

Reversible ceiling fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,35	Weight (Kg)	7,1
Absorbed Power max (W)	70	Airflow speed at max speed (m/s)	2,08
Blades diameter	1488	Delivery max (m <sup>3</sup> /h)	16586
Frequency (Hz)	50	Delivery max (m <sup>3</sup> /min)	276,43
Insulation Class	I°	RPM	197
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	3,949
		Sound power level Lw [dB(A)]	52,6

### DIMENSIONS

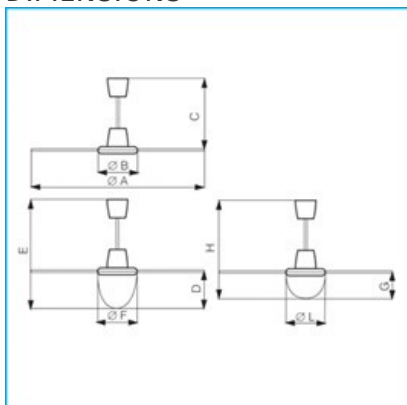

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 61752

## NORDIK EVOLUTION R 140/56" BIANCO



Reversible ceiling fans

### DESCRIPTION

- Nominal diameter of blades 1400 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 16586 m<sup>3</sup>/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
  - with lamp rated 105 W max, E27 screw fitting
  - with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

### ACCESSORIES



#### ASTA NK I 200 BIANCA

Code 22032



#### ASTA NK I 250 BIANCA

Code 22033



#### ASTA NK I 350 BIANCA

Code 22042



#### ASTA NK I 500 BIANCA

Code 22051



#### ASTA NK I 750 BIANCA

Code 22074



#### ASTA NK I 1000 BIANCA

Code 22077



#### EVOLUTION LIGHT KIT

Code 22413



#### EVOLUTION LIGHT KIT ES

Code 22414



#### SCRR5

Code 12963



#### SCRR5L

Code 12964



#### SCRR/M

Code 12965

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)





**TELENORDIK  
5TR**  
Code 22386



**KIT  
SCBRR5/5L/M**  
Code 22489



**SET PALE NK I  
PLUS 140/56  
BIANCO INT**  
Code 22633



**SC 503 B**  
Code 12801



**SC 503 N**  
Code 12802



**SC EXT B**  
Code 12803



**PSC-W**  
Code 22462



**PSC-B**  
Code 22463



**SCI503**  
Code 22461