

Technical Data Sheet

CODE 61755

NORDIK EVOLUTION R 120/48" RADICA

Reversible ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Delivery max (m ³ /h)	13810
Insulation Class	I°	Delivery max (m ³ /min)	230,17
Voltage (V)	220-240	RPM	198
Airflow speed at max speed (m/s)	2,36	Service value (m ³ /min)/W	3,288
		Sound power level Lw [dB(A)]	49,1

DIMENSIONS

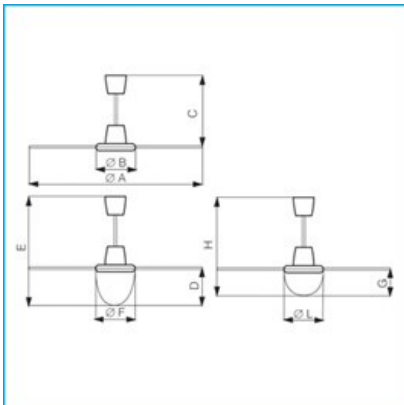

Size A (mm)	1284
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61755

NORDIK EVOLUTION R 120/48" RADICA



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour wood grain.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour wood grain.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour wood grain, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
 - with lamp rated 105 W max, E27 screw fitting
 - with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION LIGHT KIT

Code 22413



EVOLUTION LIGHT KIT ES

Code 22414



SCRR5

Code 12963



SCRR5L

Code 12964



SCRR/M

Code 12965



KIT SCBRR5/5L/M

Code 22489



SC 503 B

Code 12801



SC 503 N

Code 12802



SC EXT B

Code 12803



SCI503

Code 22461



PSC-W

Code 22462

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com



PSC-B

Code 22463



**ASTA DECOR
1000 RADICA
ELLECI**

Code 22071

**ASTA DECOR
275 RADICA
ELLECI**

Code 22047



**ASTA DECOR
500 RADICA
ELLECI**

Code 22092

**ASTA DECOR
350 RADICA
ELLECI**

Code 22058



**TELENORDIK
5TR**

Code 22386

**ASTA DECOR
750 RADICA
ELLECI**

Code 22064



**SET PALE
120/48
RAD.PLUS-
EVOL INT**

Code 22639