

# Technical Data Sheet


CODE 60615

## GORDON 40/16"

Oscillating table, wall-mounting and pedestal fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,19	Delivery 3rd speed (m <sup>3</sup> /h)	4000
Absorbed Power max (W)	40	Delivery max (m <sup>3</sup> /h)	4000
Frequency (Hz)	50-60	Delivery max (m <sup>3</sup> /min)	66,67
Insulation Class	II°	Max delivery at max speed (m <sup>3</sup> /h)	4000
Voltage (V)	220-240	RPM	1145
Weight (Kg)	2,7	Service value (m <sup>3</sup> /min)/W	1,667
Airflow speed at max speed (m/s)	1,61	Sound power level Lw [dB(A)]	57,2

### DIMENSIONS

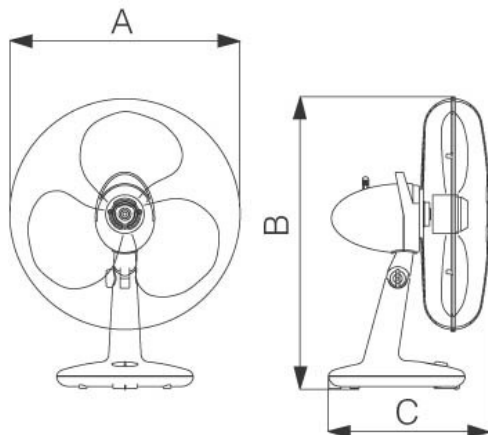

Size A (mm)	∅
	458
Size B (mm)	570,5
Size C (mm)	302,5

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 60615

## **GORDON 40/16"**

Oscillating table, wall-mounting and pedestal fans

---



### DESCRIPTION

- Material: plastic resin able to withstand aging induced by exposure to sunlight (UV-resistant), and formulated with an antistatic compound to prevent accumulation of dust.
- Nominal diameter 400 mm
- 3 speed asynchronous motor with thermal overload protection and shaft turning in self-aligning and self-lubricating bushings, coupled to oscillating mechanism generating movement through an angle of approx 90° maximum.
- Motor housing equipped with hinge and clamp knob for adjustment of tilt angle.
- Rotary on/off switch and fan speed selector
- Power cord with moulded plug.
- Maximum air flow 4,000 m3/h
- IMQ SAFETY and IMQ PERFORMANCE certifications

**PER INFORMAZIONI:**

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)