

GORDON EVO Range



New range of 6 oscillating fans-tabletop, floor-standing, and wall-mounted-equipped with “soft-touch” controls and remote control (depending on model), with a clean, modern aesthetic that integrates perfectly into both domestic and commercial environments such as shops or offices.



GORDON EVO 20/8" R



GORDON EVO 20/8"




GORDON EVO 30/12"

GORDON EVO C 40/16"
With remote control

Remote control



GORDON EVO 40/16"
With remote control

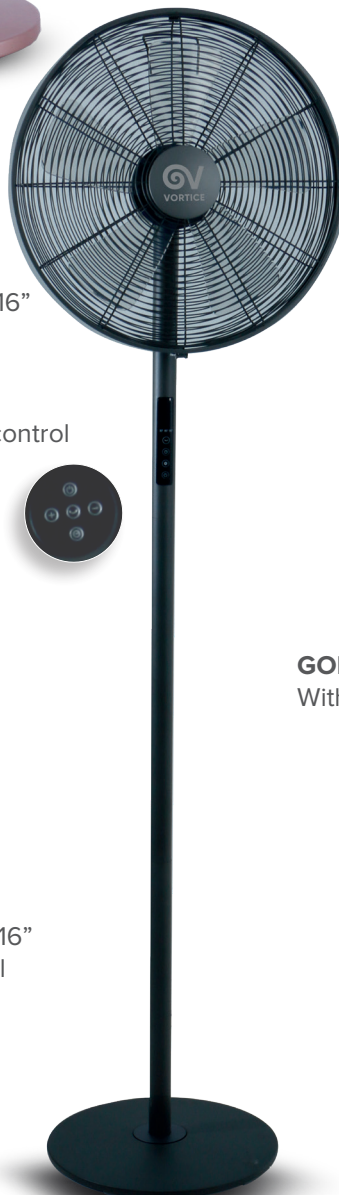

GORDON EVO W 35/14"
With remote control



GORDON EVO RANGE
SUMMER VENTILATION

Particularly quiet operation, ideal for all contexts.



4 or 8 speed motor fan, allowing adjustment of airflow intensity as needed.

Automatic horizontal oscillation of the fan unit creates a pleasant breeze over a wide area, avoiding direct airflow on occupants.

Brushless DC motor ensures low consumption with high performance.

Programmable timer allows for automatic fan shutdown, further optimizing energy usage.

DIMENSIONS

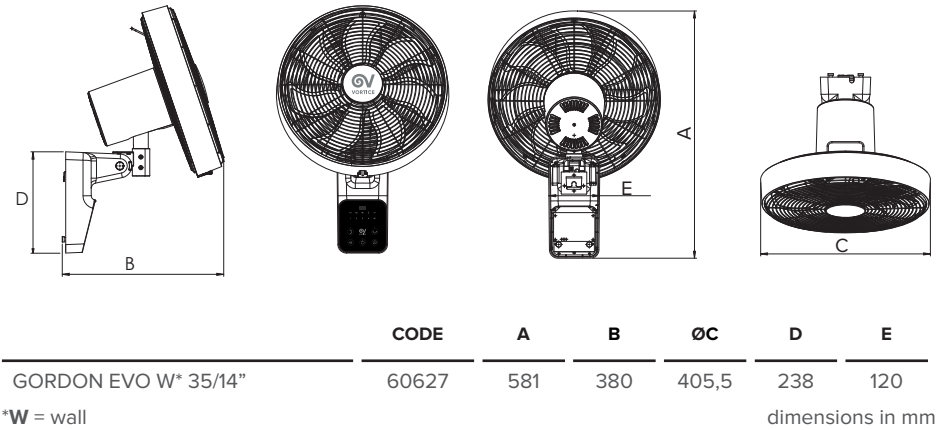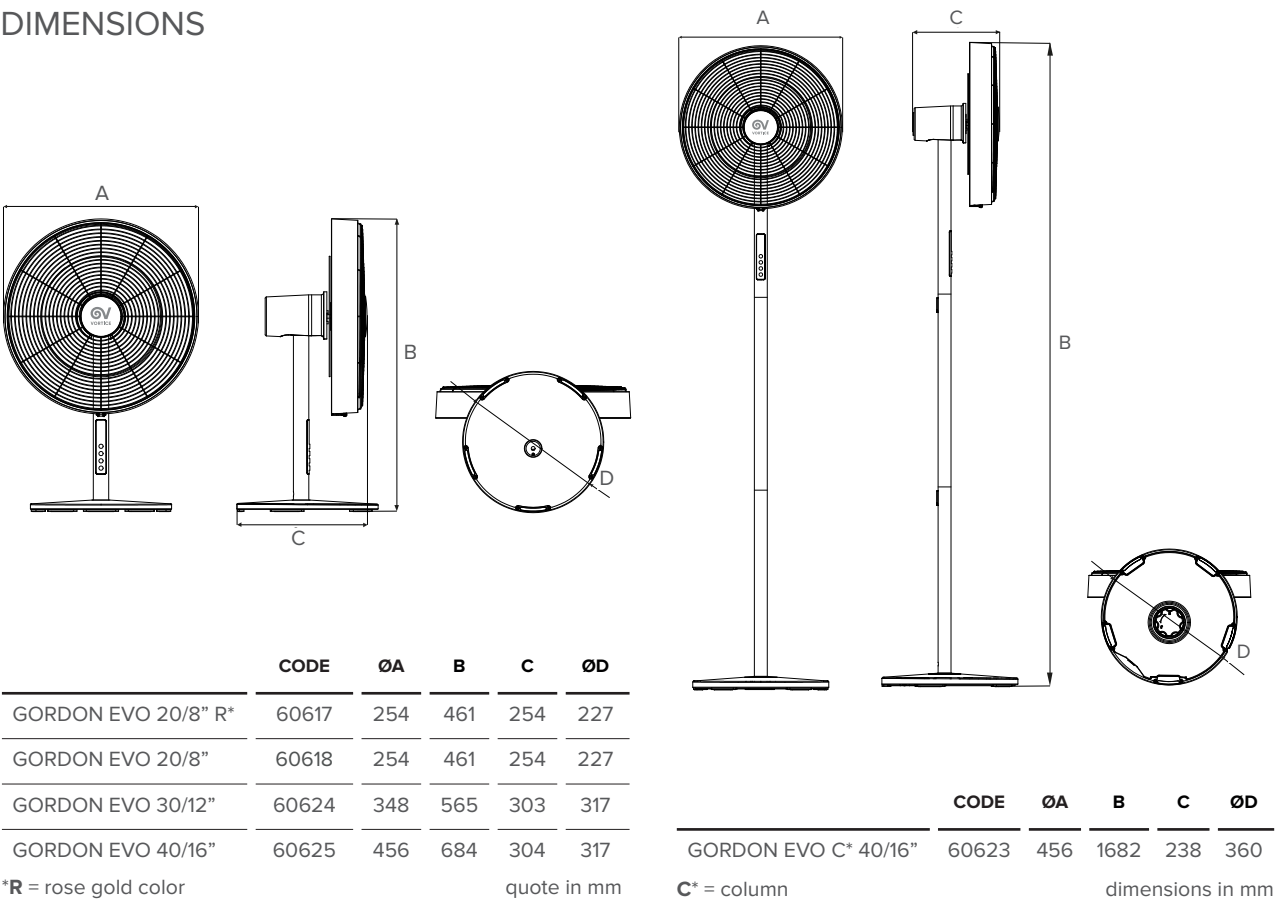




TECHNICAL FEATURES

- Grille, motor housing, and base made of grey painted metal (rose gold for model 20/8" R only).
- Central frame (between front and rear grilles) in grey-painted ABS plastic (rose gold for 20/8" R).
- Support pole in grey-painted metal (aluminium for C 40/16 and 40/16 models).
- GORDON EVO C 40/16 features a modular pole with quick-connect mechanism for height adjustment (max 1.69 m).
- Touch buttons with LED/display on the pole.
- IR remote control (circular shape) for C 40/16, 40/16, and W 35/14 models.
- Axial impeller directly coupled with DC brushless motor, 4 or 8 speeds depending on the model.
- Automatic horizontal oscillation in all models. On C 40/16 and 40/16, angle selectable between 30°, 60°, or 90°.
- W 35/14 wall model features automatic vertical oscillation (30° tilt), with possibility to activate both oscillations simultaneously.
- Wall bracket with 4 screws and plugs included for W 35/14 model.
- Timer: programmable for up to 4 or 8 hours depending on the model.
- 24V power supply with Italian plug and 180 cm cable (150 cm for wall model).

PRODUCT	CODE	ADAPTER INPUT VOLTAGE (V)	FREQUENCY (HZ)	POWER SUPPLY OUTPUT (V)	W max	A max	MAX AIRFLOW m³/h	KG
GORDON EVO 20/8" R*	60617	100-240	50/60	24	14	0,4	1200	3,5
GORDON EVO 20/8"	60618	100-240	50/60	24	14	0,4	1200	3,5
GORDON EVO 30/12"	60624	100-240	50/60	24	22	0,4	2340	5,3
GORDON EVO W 35/14"	60627	220-240	50/60	-	45	0,2	3885	3,9
GORDON EVO 40/16"	60625	100-240	50/60	24	24	0,8	2640	6,5
GORDON EVO C 40/16"	60623	100-240	50/60	24	24	0,8	2640	13,3

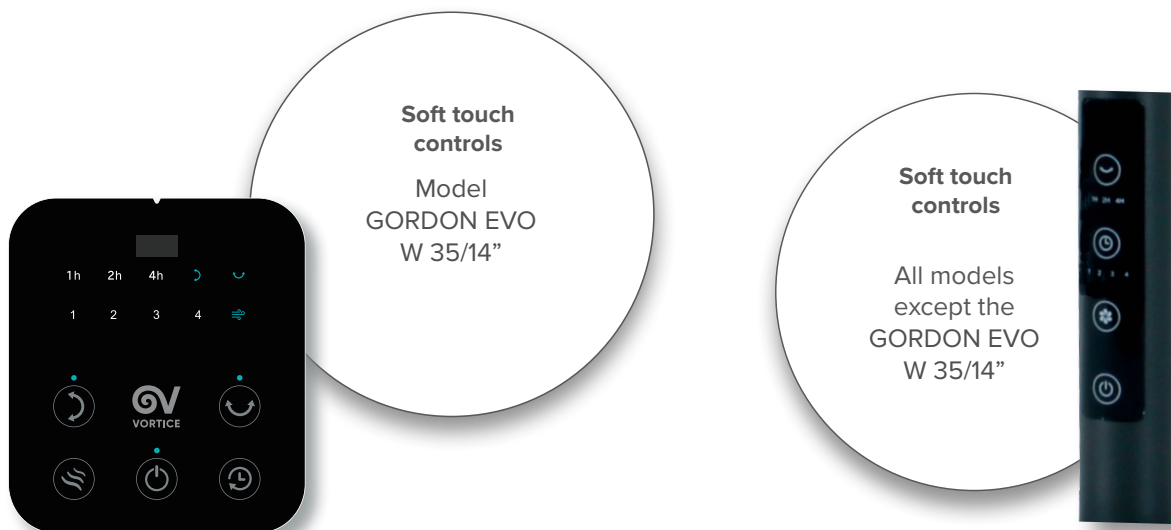

VORTICE GROUP COMPANIES

VORTICE S.P.A

Strada Cerca, 2
Frazione di Zoate
20067 Tribiano
(Milano) Italia
Tel. (+39) 02 906991
vortice.com
P.IVA IT 04474410968

BUSINESS UNIT INDUSTRIAL

Via B. Brugnoli 3,
37063 Isola della Scala
(Verona) Italia
Tel. (+39) 045 6631042
vorticeindustrial.com
P.IVA IT 04474410968

VORTICE LIMITED

Beeches House
Eastern Avenue
Burton on Trent
DE13 0BB United Kingdom
Tel. (+44) 1283-49.29.49
vortice.ltd.uk

CASALS VENTILACIÓN AIR INDUSTRIAL S.L.

Ctra. Camprodon, s/n 17860
Sant Joan de les Abadesses
(Girona) Spain
Tel. (+34) 972720150
casals.com

VORTICE LATAM S.A.

Bodega #6
Zona Franca Bes Alajuela,
Alajuela 20101
Costa Rica
Tel. (+506) 2201.6934
vortice-latam.com

VORTICE VENTILATION SYSTEM

(Changzhou) Co.LTD
No. 388 West Huanghe Road
Building 19, Changzhou
Post Code: 213000 China
Tel. (+86) 0519 88990150
vortice-china.com

The descriptions and illustrations in this catalogue are intended to be indicative and not binding. Without prejudice to the essential features of the products described and illustrated here, VORTICE reserves the right to modify parts, aesthetic details or supply of accessories without prior notice and whenever necessary to improve or meet any construction or commercial requirements.
This printout completely cancels and replaces all previous ones.

May 2025

