



**NEW AIR**  
**PURIFIERS AND**  
**SANITISERS**



**VORTICE S.p.A.** is part of a multinational group, **VORTICE GROUP**, which operates through its own companies or local distributors in over 90 countries worldwide and has a rich product portfolio that guarantees air quality and climate comfort. The headquarters of VORTICE S.p.A are in Tribiano (Milan).



VORTICE GROUP also includes:

[1]  
**VORTICE UK Ltd.**, English branch of VORTICE S.p.A, established in 1977 and based in Burton on Trent.

[2]  
**VORTICE INDUSTRIAL**, born from the acquisition in 2010 of Loran srl, based in Isola della Scala (VR).

[3]  
**VORTICE Ventilation System**, a company inaugurated in 2013 with headquarters in Changzhou, China.

[4]  
**VORTICE Latam**, based in Alajuela in Costa Rica, established in 2012.

[5]  
**CASALS VENTILACIÓN AIR INDUSTRIAL S.L.**, historic Spanish brand, based in Sant Joan de les Abadesses, Girona, acquired in 2019.

## INDEX

p 06

### **HOW THE FILTERING AND SANITISING SYSTEM WORK**

DEPURO PRO EVO AND DEPURO SKY EVO.

p 10

### **DEPURO PRO AND DEPURO PRO EVO**

Portable air purifiers and sanitisers for commercial and industrial applications.

p 24

### **DEPURO SKY AND DEPURO SKY EVO**

High efficiency air purifiers and sanitisers for ceiling and concealed installation and for commercial and industrial applications.

## Regulatory standards

The products of the DEPURO PRO and DEPURO SKY Ranges are compliant with the following Directives and Standards in their most recent versions:

- 
- Machinery Directive: 2006/42/EC;
  - Electromagnetic Compatibility Directive: 2004/108/EC; 2014/30/EC;
  - RoHS Directive: 2011/65/EU;
  - WEEE Directive: 2012/19/EU;
  - ECODSIGN Directive 2009/125/EC for fans according to ERP Regulation No. 327/2011/EU;
  - Electrical Safety Regulations: EN 60204-1; EN 12000; EN 13857; EN 60335-1; EN 60335-2-65; EN 60529; EN 62233;
  - Electromagnetic Compatibility Emission Standard: EN 55014-1; EN 55014-2; EN 61000-3-2; EN 61000-3-3.



PURIFIED  
AIR



FILTERED  
AIR



SANITISATION



LOW  
CONSUMPTION



GREAT  
ROBUSTNESS

## AIR PURIFIERS AND SANITISERS

The quality of indoor air has never been as crucial for a healthy life and for the people's well-being as it is today. Air quality technologies represent essential solutions to reduce the risk of the spread of pathogens such as viruses, bacteria and moulds, but also dust, mites, seasonal pollen and fine dust.


In order to improve the air quality, it is fundamental to focus on air exchange, purification and sanitisation. Combining these three processes, it is possible to act on the pathogens, so to neutralise them and consequently to ensure the health and safety of the people in the rooms.





# AN EFFECTIVE TECHNOLOGY AGAINST COVID-19

## FILTERING AND SANITIZING SYSTEM OF EVO MODELS

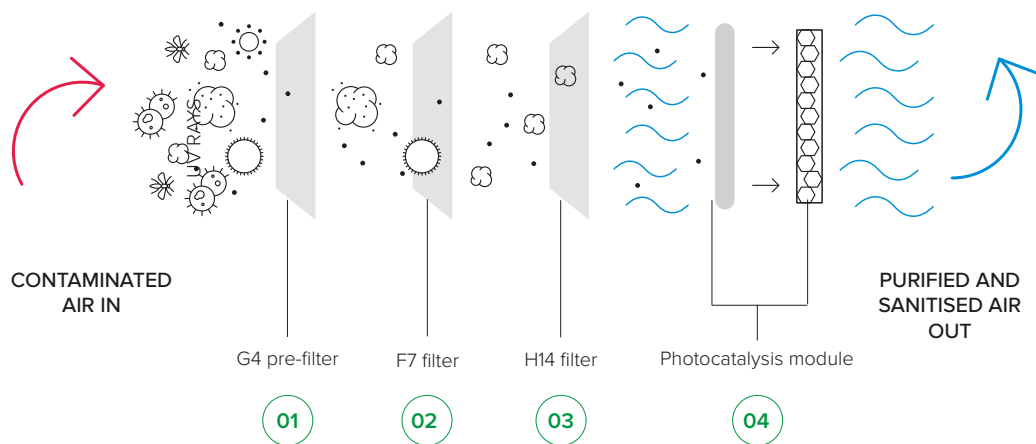

6

### 01 ISO Coarse 65% (G4) pre-filters

ISO Coarse 65% (G4) pre-filters located at the intake ports for all models.

### 02 ISO ePM1 70% (F7) filters

ISO ePM1 70% (F7) filters, located at the intake ports only for Depuro Sky Range purifiers.

The ISO Coarse 65% pre-filters and the ISO ePM1 70% filters retain all the macro impurities of the air, protecting the filters behind them and thus prolonging their life.

### 03 HEPA H14 filters

HEPA H14 absolute filters, capable of retaining up to 99.995% of microparticles (equivalent diameter  $\leq 0.3\mu\text{m}$ ).

HEPA filters are highly effective and guarantee the control of coarse, fine and ultra-fine dust particles, allergens and microorganisms.



# AN EFFECTIVE TECHNOLOGY AGAINST COVID-19

04

## Photocatalysis module (EVO models)

The photocatalysis unit used is based on the photocatalytic oxidation process (used in hospitals and in the aerospace, medical and food industries), which is a natural phenomenon that occurs in the presence of ultraviolet rays from the sun, air humidity and some noble metals. The combination of these three factors triggers the release of oxidising ions capable of neutralising the majority of pathogens in the air, which are potentially dangerous to our health.




The DEPURO PRO EVO and DEPURO SKY EVO ultraviolet (UV) lamp illuminates a catalyst made from a special alloy based on titanium dioxide ( $\text{TiO}_2$ ), which causes a photochemical reaction where oxygen (O) atoms bind with molecules of water ( $\text{H}_2\text{O}$ ) dissolved in the air in the form of vapour.

The hydrogen peroxide molecules ( $\text{H}_2\text{O}_2$ ) generated from this reaction are sufficient to eliminate most of the bad odours, moulds, bacteria, viruses and allergens present both in the air and on the surfaces, SANITISING THEM.

The estimated service life of the UV lamp is two years.

8

### How a photocatalytic system works\*

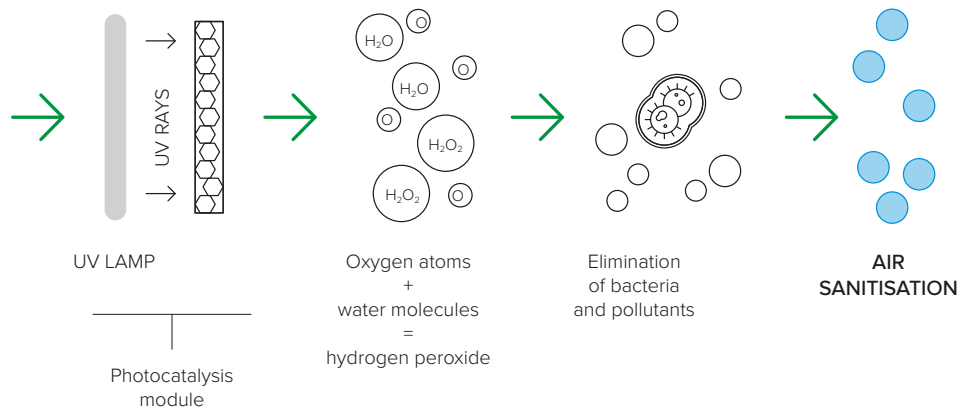

\*Diagram of a generic photocatalysis process (by way of an example).

The irradiation of the catalyst through an ultraviolet light with an adequate wavelength activates the release of OH free radicals whose action, strongly oxidising, is the basis of the sanitisation process: atmospheric pollutants such as carbon dioxide ( $\text{CO}_2$ ), sulphur oxides ( $\text{SO}_x$ ), nitrogen oxides ( $\text{NO}_x$ ), carbon monoxide (CO) and polycyclic aromatic hydrocarbons (PAHs) are transformed into compounds characterised by levels of heavily reduced toxicity, as in the case of nitrogen monoxide (NO) and nitrogen dioxide ( $\text{NO}_2$ ), which are both converted into  $\text{NO}_3$ .

Similarly, VOCs, a category of compounds to which, among others, formaldehyde and acetone belong, are among the primary causes of bad odours in enclosed environments: they are decomposed and transformed into harmless substances, such as  $\text{CO}_2$  and water.

In case of pathogenic microorganisms such as bacteria and viruses, the impact of the oxidising action damages their outer protective coating, which causes their death.





## RIASSUNTO CONCLUSIVO

### DICHIARAZIONE EFFICACIA TECNOLOGIA DUST FREE





Dalla sperimentazione condotta all'interno del Dipartimento di Scienze biomediche e cliniche "Luigi Sacco" si evince che la tecnologia Dust-Free FC UNIT 3" ha mostrato capacità di abbattere la carica virale di SARS-CoV-2 inoculata in fase liquida sia su una superficie che su un tessuto.

L'abbattimento verificato sul petri inoculato di SARS-CoV-2, esposto all'aria trattata per 20 minuti in un volume di 2,13 m<sup>3</sup>, ha mostrato una riduzione di 1.0 log (90.0%) maggiore rispetto al decadimento naturale del virus verificato nella prova di controllo, eseguita a pari condizioni, ma senza tecnologia Dust Free.


L'abbattimento verificato sul panno costituito per il 45% in polietere e 55% cellulosa, inoculato di SARS-CoV-2, esposto all'aria trattata per 20 minuti in un volume di 2,13 m<sup>3</sup>, ha mostrato invece una riduzione di 2.5 log (99.7%) maggiore rispetto al decadimento naturale del virus verificato nella prova di controllo, eseguita a pari condizioni, ma senza tecnologia Dust Free.

Il ventilatore impiegato ha portata d'aria pari a 35 mch.

### PROTOCOLLO DI VALUTAZIONE DELL'ATTIVITA' VIRUCIDA DEL DISPOSITIVO NEVOLA SU SARS-CoV-2

	NOME	FUNZIONE	FIRMA	DATA
Redatto da	David Piatto	Principal Investigator		09/11/2020
Revisionato da	Luca Galli	Committente (Air-Control Srl)		09/11/2020
	Luca Talamelli	Produttore Nevola (Kemin Textile Srl)		09/11/2020
Approvato da	Maria Rita Girometta	Supervisore		9/11/2020

Abbattimento % del SARS-CoV-2 tramite tecnologia Dust Free

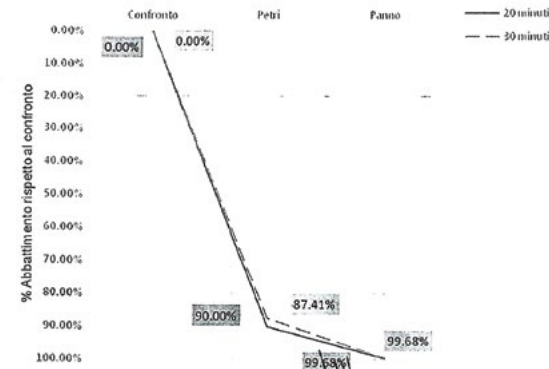

PROTOCOLLO DI VALUTAZIONE DELL'ATTIVITA' VIRUCIDA DEL DISPOSITIVO NEVOLA SU SARS-CoV-2

Dipartimento di Scienze biomediche e cliniche "Luigi Sacco"  
Via G.B. Grassi, n°74 - 20157 Milano, Italy



### DECLARATION EFFECTIVENESS "DUST FREE TECHNOLOGY "

From the experimentation conducted within the Department of Biomedical and Clinical Sciences "Luigi Sacco" it is clear that the Dust-Free FC UNIT 3" technology has shown the ability to break down the viral load of SARS-CoV-2 inoculated in liquid phase both on a surface and on a tissue. The abatement verified on the inoculated petri dish of SARS-CoV-2, exposed to treated air for 20 minutes in a volume of 2.13 m<sup>3</sup>, showed a reduction of 1.0 log (90.0%) greater than the natural decay of the virus verified in the control test, performed under equal conditions, but without Dust Free technology. The abatement verified on the cloth consisting of 45% polyether and 55% cellulose, inoculated with SARS-CoV-2, exposed to the treated air for 20 minutes in a volume of 2.13 m<sup>3</sup>, showed a reduction of 2.5 log (99.7%) greater than the natural decay of the virus verified in the control test, performed under the same conditions, but without Dust Free technology. The fan used has an air flow rate of 35 mch.

# DEPURO PRO

# DEPURO PRO EVO

**Portable air purifiers and sanitisers  
for commercial and industrial  
applications.**

Range of portable purifiers with high filtering capacity: the pair of HEPA H14 absolute filters, fully compliant with the EN1822 standard requirements, is able to retain pollutants such as pollen, spores, droplets and microparticles, potential vectors of viruses and bacteria, thus significantly limiting the risk of contracting allergies, asthma, respiratory problems and infections. Moreover, the EVO models combine mechanical filters with a photocatalysis module to sanitise the treated air flow, eliminating the majority of bad odours, moulds, bacteria, viruses and allergens present both in the air and on surfaces.



## USE

**DEPURO PRO are particularly suitable for purification and DEPURO PRO EVO also for air sanitization in domestic, commercial or industrial environments up to 135m<sup>2</sup>.**

As an example, some of the places where they can be used are analysis laboratories, medical and dental offices, offices, meeting rooms, bars, restaurants, gyms, fitness centres, beauty centres and hair salons, shops, professional offices, pharmacies, RC, schools and kindergartens, warehouses and logistics centres, workshops, etc.



Beauty centres and hair salons

## BENEFITS FOR THE USER

### DEPURO PRO effective against viruses and bacteria DEPURO PRO EVO also effective against COVID-19

01

#### Effectiveness against microorganisms,

thanks to the very high filtering capacity of the pair of HEPA H14 absolute filters, capable of retaining up to 99.995% of microparticles (equivalent diameter 0.3µm).

02

#### Effective sanitising action

of the EVO models, thanks to their photocatalysis module, against fungi, bacteria and viruses, including the SARS-CoV2 virus responsible for the COVID-19 pandemic, as proven by the tests performed at the Biomedical and Clinical Sciences Department "Luigi Sacco" of the University of the Studies of Milan.

03

#### Reduced consumption,

thanks to the high efficiency fans driven by EC motors (brushless).

04

#### Easily transportable,

thanks to the handle and the 4 wheels equipped with a blocking device for a greater safety of use.

05

#### Simple and intuitive management:

the integrated control panel makes the operation modes setting and filter replacement very easy.

06

#### Great robustness,

as a result of the design and construction solutions adopted, starting from the casing, which boasts excellent resistance to impact and corrosion.

07

#### Easy installation:

just insert the plug into the electrical outlet. **Plug and Play.**

08

#### Easy maintenance.

The need to replace the filters is signaled by the control panel. Moreover, filters and photocatalysis module are easily replaceable, thanks to the quick release of the panels.





Common rooms and waiting rooms



## APPLICATIONS



Professional offices and  
artisan workshops



Gyms and changing rooms

Medical offices and laboratories



Schools and kindergartens



## TECHNICAL CHARACTERISTICS

### Available models

- 4 models available, differing for dimension, performances and for the presence, in the EVO models, of the photocatalysis module
- **DEPURO PRO 150 (code 25038) and DEPURO PRO EVO 150 (code 25089)** having a maximum flow rate of 300 m<sup>3</sup>/h for environments up to 50 m<sup>2</sup>.
- **DEPURO PRO 300 (code 25039) and DEPURO PRO EVO 300 (code 25090)** having a maximum flow rate of 600 m<sup>3</sup>/h for environments up to 100 m<sup>2</sup>.

### Casing

- Extruded aluminium profile, 30mm thick, with nylon corner joints.
- 25mm thick sandwich panels in pre-painted steel sheet, light gray, RAL 9006, class M0, with anti-corrosion finish, acoustically insulated with fire-resistant rock wool (class A1), density 90 Kg/m<sup>3</sup>.
- Rectangular air intake and delivery ports complete with protection grilles.

### Fans

- **High efficiency fan**, adjustable in the 0-100% range by using the integrated buttons in the control panel. The fan motor unit consists of a single-phase EC (brushless) motor of the external rotor type, with IP44 protection, class B insulation, directly coupled to a centrifugal, self-cleaning impeller with reversed blades, moulded in polyamide, statically and dynamically balanced at the factory.

### Photocatalysis (EVO models)

- **The technology of the DUST FREE modules** uses the combined action of the rays of a special **UV lamp** with a catalyst structure built from a metal alloy with honeycomb matrix, mainly composed of **TiO<sub>2</sub> (titanium dioxide)** and, to a minor extent, of other noble metals.

### Filters

- **Dual stage filtering system** composed of:
  - **2 ISO Coarse 65% (G4) class pre-filters** located at the intake ports;
  - **2 HEPA H14 absolute filters, capable of retaining up to 99.995% of microparticles (equivalent diameter ≤ 0.3µm).**
- The pre-filters, located at the intake ports, retain the macro impurities of the air, protecting the absolute filters behind them and thus prolonging their life.  
The actual need for periodic replacement of the filters is indicated on the control panel on the machine.

### Control panel

- Control panel, located at one of the side walls of the product, for:
  - switching on/off;
  - activating/deactivating the photocatalysis module (in EVO models);
  - programming, on a daily basis, the operation of the product, which will automatically switch on/off at the previously set hours;
  - programming, in three time bands, the fan speed so that the ideal compromise between efficient purification, noise emissions and consumption can be reached;
  - programming on a daily basis of the switching on/off of the UV lamp, which activates the photocatalysis process (in EVO models);
  - setting the operating mode: Manual (switching on and off are left to the user) or Automatic (time programming previously set);
  - adjustment of the treated air flow;
  - indication, distinguished by type, of the occurred saturation of the filters (G4 and H14) and the consequent need for their replacement.

2 HEPA H14 FILTERS

2 HEPA H14 FILTERS, capable of retaining up to 99.995% of microparticles (equivalent diameter  $\leq 0.3\mu\text{m}$ ).



Low consumption.



Control panel.



Quiet operation, guaranteed by sound-absorbing sandwich panels.



Panels with knobs and quick release closure devices, providing easy access to the filters.

Equipped with Brushless motors.



Photocatalysis module in the EVO models.



Power cable 3 metres long with Shuko plug.



Plug&Play.



Easily transportable, thanks to the handle and 4 wheels for easier movement of the product.



DEPURO PRO AND DEPURO PRO EVO  
PORTABLE AIR PURIFIERS AND SANITISERS  
FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

18



Offices and meeting rooms








**DEPURO PRO AND DEPURO PRO EVO**  
 PORTABLE AIR PURIFIERS AND SANITISERS  
 FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

**Technical data**

PRODUCT	CODE	V~50/60Hz	W max	A max	RPM max	MAX FLOW RATE (m <sup>3</sup> /h)	SURFACES UP TO (m <sup>2</sup> )	Lp dB (A) 6m	TEMP. °C min/max	WEIGHT Kg
DEPURO PRO 150	25038									
		230	34	0.40	3,980	300	50	41	-25/50	30
DEPURO PRO EVO 150	25089									
DEPURO PRO 300	25039									
		230	78	0.70	3,600	600	100	44	-25/50	50
DEPURO PRO EVO 300	25090									

**Dimensions**

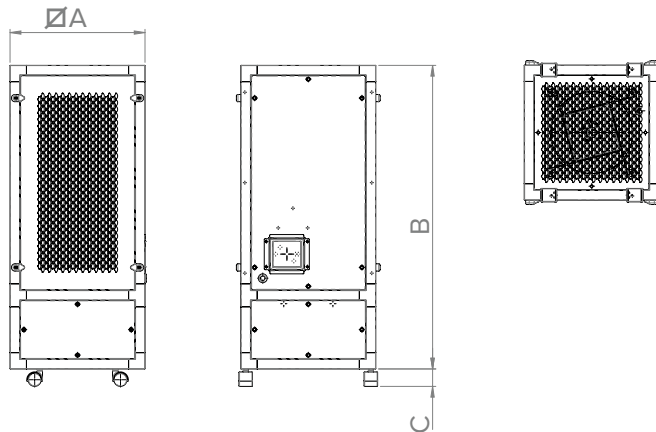

PRODUCT	∅A	B	C
DEPURO PRO 150			
	412	622	53
DEPURO PRO EVO 150			
DEPURO PRO 300			
	412	927	53
DEPURO PRO EVO 300			

Dimensions in mm

20

**Replacement filters**

	DESCRIPTION	CODE	PRODUCT
	<b>2FTR-ISO COARSE 65% (G4) 287x287x24</b> Pair of ISO Coarse 65% (G4) class filters for DEPURO PRO 150. Dimensions: 287 x 287 x 24	<b>13040</b>	<b>25038 25089</b>
	<b>2FTR-ISO COARSE 65% (G4) 287x592x24</b> Pair of ISO Coarse 65% (G4) class filters for DEPURO PRO 300. Dimensions: 287 x 592 x 24	<b>13041</b>	<b>25039 25090</b>
	<b>2FTR-H14 305x305x66</b> Pair of H14 absolute filters for DEPURO PRO 150. Dimensions: 305 x 305 x 66	<b>13042</b>	<b>25038 25089</b>
	<b>2FTR-H14 305x610x66</b> Pair of H14 absolute filters for DEPURO PRO 300. Dimensions: 305 x 610 x 66	<b>13043</b>	<b>25039 25090</b>

**Filters technical data**

DESCRIPTION	EFFECTIVENESS	CODE	AVERAGE SURFACE (m <sup>2</sup> )	PRESSURE DROP (Pa)	KG
<b>FTR-ISO COARSE 65% (G4)</b>	ISO COARSE 65%	13040	0.2	70	0.2
<b>FTR-ISO COARSE 65% (G4)</b>	ISO COARSE 65%	13041	0.3	70	0.2
<b>FTR HEPA H14</b>	99.995%	13042	2.0	175	1.9
<b>FTR HEPA H14</b>	99.995%	13043	4.1	175	3.2




## EXPLODED VIEW OF THE FILTERING AND SANITISING SYSTEM

CONTAMINATED AIR IN



ISO Coarse 65% (G4)  
class pre-filter

01




HEPA H14 filter

02

Photocatalysis module,  
present on EVO models only,  
able to guarantee the removal  
of viruses and bacteria  
vectors and the sanitisation of  
the treated air flow.

03

CONTAMINATED AIR IN

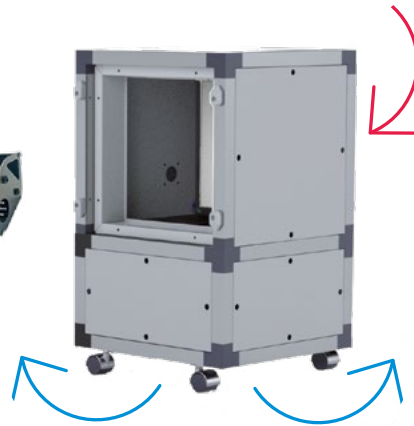

PURIFIED AND SANITISED  
AIR OUT



Titanium dioxide catalyst  
(TiO<sub>2</sub>) which encloses the  
UV lamp

Metal housing which  
encloses the UV  
lamp electronic  
transformer.



**DEPURO PRO AND DEPURO PRO EVO**  
PORTABLE AIR PURIFIERS AND SANITISERS  
FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

22



Bars, restaurants, diners and cafeterias







## DEPURO SKY AND DEPURO SKY EVO

HIGH EFFICIENCY INSTALLATION AIR PURIFIERS AND SANITISERS  
FOR CEILING AND CONCEALED INSTALLATION AND FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

# DEPURO SKY


# DEPURO SKY EVO



### Installation air purifiers and sanitisers for commercial and industrial applications.

DEPURO SKY is a range of high efficiency air purifiers which are powerful, easy to install and service, and quiet, thanks to the soundproof panels.

The DEPURO SKY air purifiers are able, thanks to the high dimensions of the filtering system, to quickly remove any concentrations of pollutants, allergens and pathogens present in the air, ensuring the safety and comfort of the occupants.

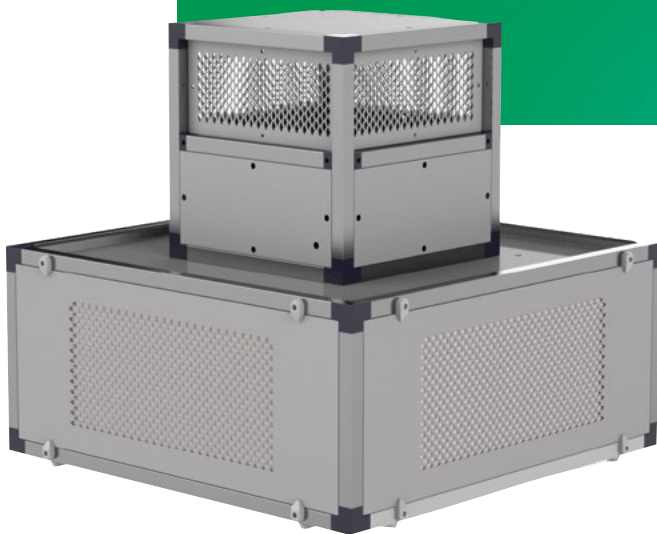

## USE

**DEPURO SKY** are particularly suitable for purification and **DEPURO SKY EVO** also for air sanitation in commercial or industrial environments with a surface area of up to 330m<sup>2</sup>.

Some examples of the places where it is possible to use them are: public buildings, meeting places and workplaces such as supermarkets, exhibition halls, gyms, restaurants, hotels, schools, universities, clinics and hospitals, offices, etc.



Medical centres, clinics and hospitals

## BENEFITS FOR THE INSTALLER

**DEPURO SKY**  
effective against viruses and bacteria  
**DEPURO SKY EVO**  
also effective against COVID-19

01

### Wide range of possible applications

thanks to the possibility of false ceiling installation with ducted distribution for the DEPURO SKY models (e.g. to meet the needs of separate premises), or directly on the ceiling for the DEPURO SKY EASY models in case of a single environment.

02

### Easy maintenance,

thanks to the panels with quick release closure devices, providing easy access to the filters and UV lamp (in EVO models). The need to replace the filters is signaled by the control panel.

## BENEFITS FOR THE USER

01

### High filtering capacity:

the HEPA H14 absolute filters are able to retain pollutants such as pollen, spores, droplets and microparticles, potential vectors of viruses and bacteria, thus significantly limiting the risk of contracting allergies, asthma, respiratory problems and infections.

02

### Effective sanitising action

**of the EVO models, thanks to their photocatalysis module**, against fungi, bacteria and viruses, including the SARS-CoV2 virus responsible for the COVID-19 pandemic, **as proven by the tests performed at the Biomedical and Clinical Sciences Department “Luigi Sacco” of the University of the Studies of Milan.**

03

### Reduced consumption

thanks to the high efficiency fans driven by EC motors (brushless).

04

### Simple and intuitive management:

the control panel with wired connection makes the operation modes setting and filter replacement very easy.

05

### Great robustness,

as a result of the design and construction solutions adopted, typical of the industrial sector, starting from the casing, which boasts excellent resistance to impact and corrosion.



Supermarkets and shops



## DEPURO SKY AND DEPURO SKY EVO

HIGH EFFICIENCY INSTALLATION AIR PURIFIERS AND SANITISERS  
FOR CEILING AND CONCEALED INSTALLATION AND FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

# APPLICATIONS



Offices and meeting rooms

28



Places of worship

Conference rooms



Fitness centres and gyms



## TECHNICAL CHARACTERISTICS

### Available models

- 4 models available, differing for dimension, performances, installation type and for the presence, in the EVO models, of the photocatalysis module.
  - **DEPURO SKY (code 25091)** and **DEPURO SKY EVO (code 25092)** having a maximum flow rate of 1,800 m<sup>3</sup>/h for environments up to 330m<sup>2</sup>.
  - **DEPURO SKY EASY (code 25093)** and **DEPURO SKY EASY EVO (code 25094)** having a maximum flow rate of 1,200 m<sup>3</sup>/h for environments up to 265m<sup>2</sup>.
- Note: In the case of environments with an height of 3 metres, considering 2 complete filtrations of the environmental air per hour.*

### Casing

- Housings with bearing structure made with extruded aluminium profiles, 30mm thick, with nylon corner joints.
- 25mm thick sandwich panels in pre-painted steel sheet, light gray, RAL 9006, class M0, with anti-corrosion finish, acoustically insulated with fire-resistant rock wool (class A1), density 90 kg/m<sup>3</sup>.
- Rectangular air intake and delivery ports complete with protection grilles which can be oriented manually (DEPURO SKY EASY EVO model).

### Fans

- **High efficiency fan motors**, whose speed can be adjusted using the control panel supplied with the device, consisting of single-phase EC (brushless) motors of the external rotor type, characterised by a IP44-grade protection and class B insulation, directly coupled to a centrifugal, self-cleaning impellers with reversed blades, moulded in polyamide, statically and dynamically balanced at the factory.

### Photocatalysis (EVO models)

- **The technology of the DUST FREE modules** uses the combined action of the rays of a special **UV lamp** with a catalyst structure built from a metal alloy with honeycomb matrix, mainly composed of **TiO<sub>2</sub> (titanium dioxide)** and, to a minor extent, of other noble metals.

### Filters

- **3-stage filtering devices**, optimised to retain impurities of progressively decreasing dimension, so to guarantee a very high overall filtering capacity of the treated air, at the same time preventing the untimely clogging of the superior class filters; the actual need for periodical filters replacement interventions is signaled on the control panel of which each machine of this range is provided.
- **The DEPURO SKY EVO model is equipped with 15 filters:** 5 ISO Coarse 65% (G4) pre-filters; 5 ISO ePM1 70% (F7) filters; 5 HEPA H-14 filters.
- **The DEPURO SKY EASY EVO model is equipped with 6 filters:** 1 ISO Coarse 65% (G4) pre-filter; 1 ISO ePM1 70% (F7) filter; 4 HEPA H-14 filters.

### Control panel

- Wire-connected control panel with LCD display for:
  - switching on/off;
  - activating/deactivating the photocatalysis module (in EVO models);
  - programming, on a daily basis, the operation of the product, which will automatically switch on/off at the previously set hours;
  - programming, in three time bands, the fan speed so that the ideal compromise between efficient purification, noise emissions and consumption can be reached;
  - programming on a daily basis of the switching on/off of the UV lamp, which activates the photocatalysis process (in EVO models);
  - setting the operating mode: Manual (switching on and off are left to the user) or Automatic (time programming previously set);
  - adjustment of the treated air flow;
  - indication, distinguished by type, of the occurred saturation of the filters, and the consequent need for their replacement;
  - connection to a Building Management System (BMS), Modbus RS485 protocol, for the simultaneous control of up to 32 devices.



6 FILTERS

The DEPURO SKY EASY models are equipped with 6 filters:  
1 ISO Coarse 65% (G4) pre-filter;  
1 ISO ePM1 70% (F7) filter;  
4 HEPA H-14 filters.



The 4 delivery sections are equipped with a diffuser which can be manually oriented upon installation.



Photocatalysis module in the EVO models.



Equipped with Brushless motors.




Low consumption.



Control panel, standard on both models.



Quiet operation, compatible with the use in commercial and industrial environments, guaranteed by the sandwich sound-absorbing panels.

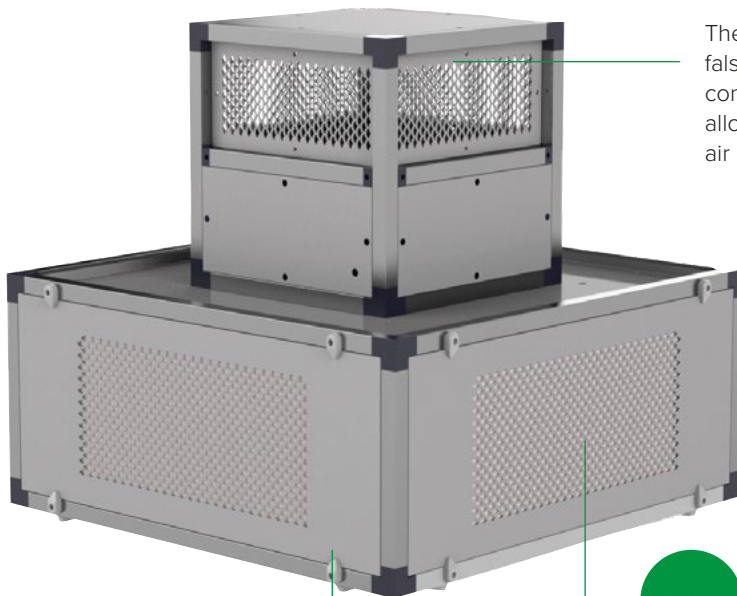

The rectangular ports hidden in the false ceiling are compatible with the connection with rectangular piping, allowing for the introduction of purified air in the premises.

15 HEPA H14

The DEPURO SKY models are equipped with 15 filters:  
5 ISO Coarse 65% (G4) pre-filters;  
5 ISO ePM1 70% (F7) filters;  
5 HEPA H-14 filters.

Panels with quick release closure device, providing easy access to the filters.

## DEPURO SKY AND DEPURO SKY EVO

HIGH EFFICIENCY INSTALLATION AIR PURIFIERS AND SANITISERS  
FOR CEILING AND CONCEALED INSTALLATION AND FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS


### Technical data

PRODUCT	CODE	V~50/60Hz	W max	A max	RPM max	MAX FLOW RATE (m <sup>3</sup> /h)	SURFACES UP TO (m <sup>2</sup> )	Lp dB (A) 6m	TEMP. °C min/max	WEIGHT Kg
DEPURO SKY	25091	230	460	2.08	1,870	1,800	330	45	-25/50	96
DEPURO SKY EVO	25092									
DEPURO SKY EASY	25093	230	460	0.77	1,551	1,200	265	41	-25/50	125
DEPURO SKY EASY EVO	25094									


Note: the DEPURO SKY Range products allow to set the fan speed to 100%.

### Dimensions

DEPURO SKY

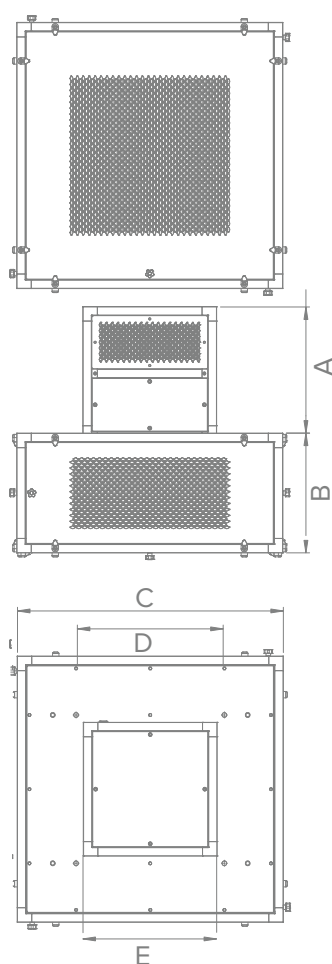

DEPURO SKY EASY

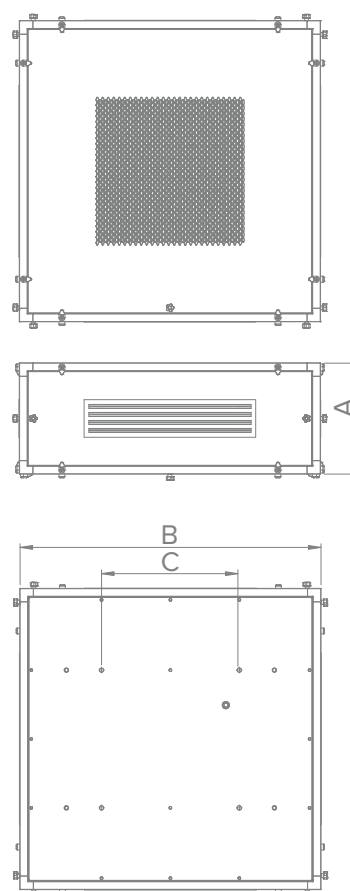




32

PRODUCT	A	B	C	D	E
DEPURO SKY	435	412	∅ 915	∅ 510	∅ 460
DEPURO SKY EVO					
DEPURO SKY EASY	412	∅ 1,115	∅ 510	-	-
DEPURO SKY EASY EVO					

Dimensions in mm

## Replacement filters

	DESCRIPTION	CODE	PRODUCT
	<b>4FTR-ISO COARSE 65% (G4) 287x592x20</b> ISO COARSE 65% (G4) class filters kit (4 pieces) to be installed at each of the 4 DEPURO SKY EVO side panels. Dimensions: 287 x 592 x 20mm	13080	25091 25092
	<b>FTR-ISO COARSE 65% (G4) 592x592x20</b> ISO COARSE 65% (G4) class filter to be installed at the DEPURO SKY EVO and DEPURO SKY EASY EVO lower panel. Dimensions: 592 x 592 x 20mm	13081	25091 25092 25093 25094
	<b>4FTR-ISO ePM1 70% (F7) 305x610x48</b> ISO ePM1 70% (F7) class filters kit (4 pieces) to be installed at each of the 4 DEPURO SKY EVO side panels. Dimensions: 305 x 610 x 48mm	13083	25091 25092
	<b>FTR-ISO ePM1 70% (F7) 610x610x48</b> ISO ePM1 70% (F7) class filter to be installed at the DEPURO SKY EVO and DEPURO SKY EASY EVO lower panel. Dimensions: 610 x 610 x 48mm	13084	25091 25092 25093 25094
	<b>4FTR-H14 305x610x68</b> H14 class absolute filters kit (4 pieces) to be installed at each of the 4 DEPURO SKY EVO and DEPURO SKY EASY EVO side panels. Dimensions: 305 x 610 x 68mm	13086	25091 25092 25093 25094
	<b>FTR-H14 610x610x68</b> H14 class absolute filter to be installed at the DEPURO SKY EVO lower panel. Dimensions: 610 x 610 x 68mm	13087	25091 25092

## Filters technical data

### DEPURO SKY

DESCRIPTION	EFFECTIVENESS	CODE		AVERAGE SURFACE (m <sup>2</sup> )	PRESSURE DROP (Pa)	KG
		SIDE PANEL	FRONT PANEL			
<b>FTR-ISO COARSE 65% (G4)</b>	ISO COARSE 65%	13080	13081	1.03	10	3.3
<b>FTR-ISO ePM1 70% (F7)</b>	FTR-ISO ePM1 70%	13083	13084	19.02	10	16
<b>FTR HEPA H14</b>	99.995%	13086	13087	33	130	23

### DEPURO SKY EASY

DESCRIPTION	EFFECTIVENESS	CODE	AVERAGE SURFACE (m <sup>2</sup> )	PRESSURE DROP (Pa)	KG
<b>FTR-ISO COARSE 65% (G4)</b>	ISO COARSE 65%	13081	0.35	15	0.9
<b>FTR-ISO ePM1 70% (F7)</b>	FTR-ISO ePM1 70%	13084	6.5	15	6
<b>FTR HEPA H14</b>	99.995%	13086	22	130	16




## DEPURO SKY AND DEPURO SKY EVO

HIGH EFFICIENCY INSTALLATION AIR PURIFIERS AND SANITISERS  
FOR CEILING AND CONCEALED INSTALLATION AND FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

# EXPLODED VIEW OF THE FILTERING AND SANITISING SYSTEM

### DEPURO SKY

The photocatalysis module, present on the EVO model only, guarantees the removal of viruses and bacteria vectors and the sanitisation of the treated air flow.

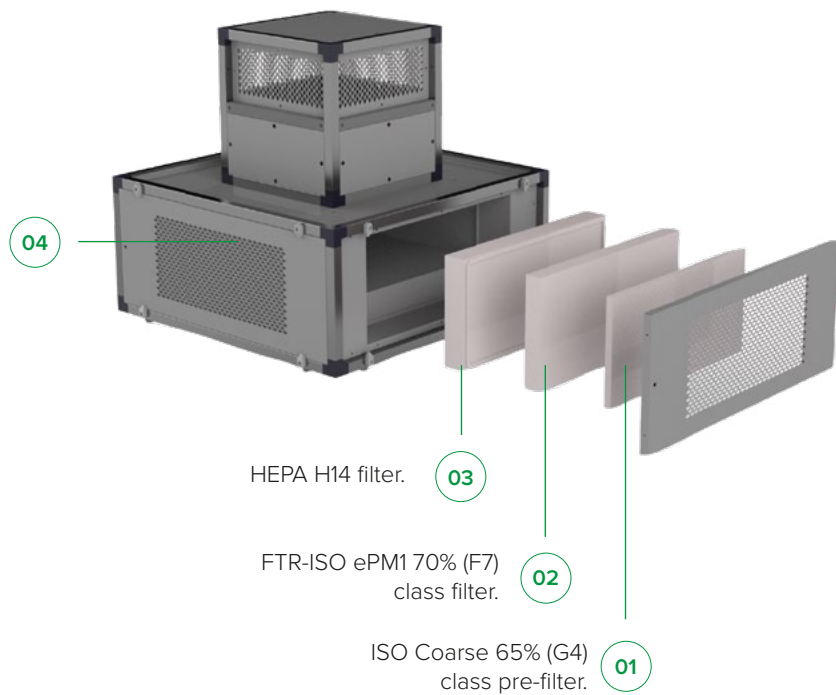


HEPA H14 filter.

FTR-ISO ePM1 70% (F7)  
class filter.

ISO Coarse 65% (G4)  
class pre-filter.

### DEPURO SKY EASY

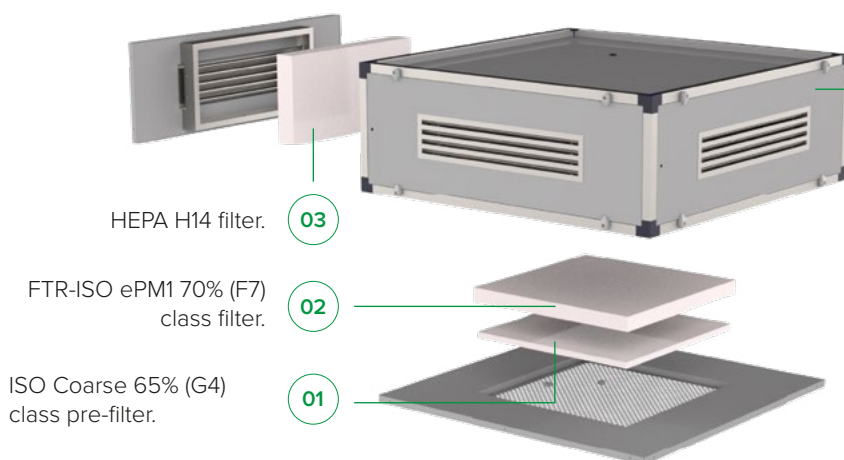

HEPA H14 filter.

FTR-ISO ePM1 70% (F7)  
class filter.

ISO Coarse 65% (G4)  
class pre-filter.


The photocatalysis module guarantees the removal of viruses and bacteria vectors and the sanitisation of the treated air flow.



## INSTALLATIONS


### DEPURO SKY - FALSE CEILING INSTALLATION WITH DUCTS

In order to install the *DEPURO SKY* purifiers, it will be necessary to remove an accessible false ceiling plate, hang the purification unit and connect it to the ducts, which will move the purified air through a maximum of 4 interchangeable paths.

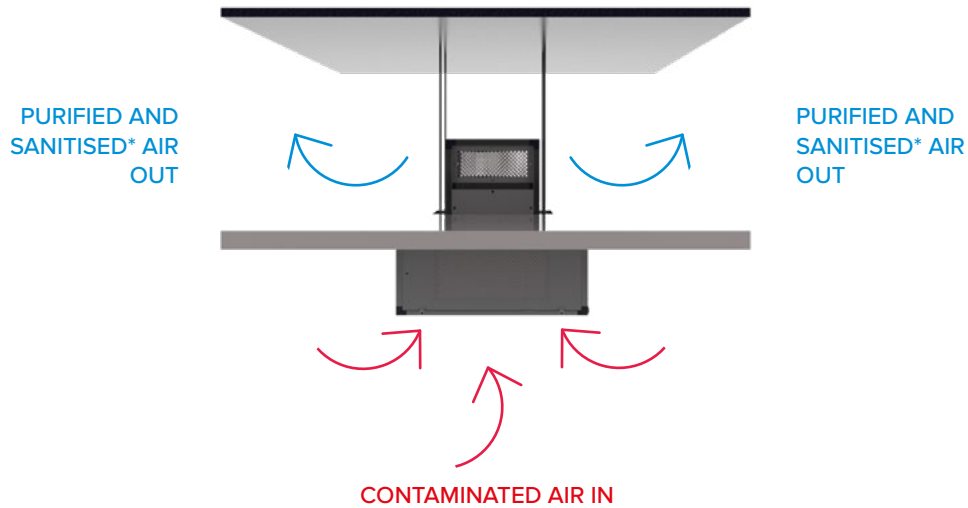

### DEPURO SKY EASY - CEILING INSTALLATION

Being a decentralised system, duct installation is not necessary, as shown below. Since the *DEPURO SKY EASY* are compact machines, they are ideal for installations on ceilings without plates.

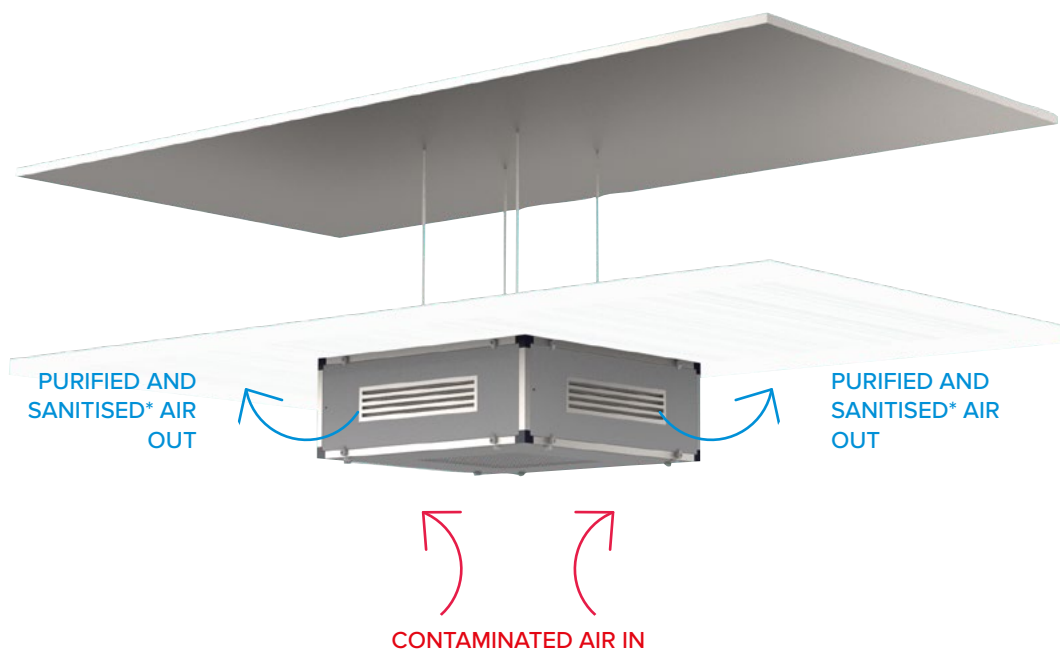

\*Mod. EVO

## DEPURO SKY AND DEPURO SKY EVO

HIGH EFFICIENCY INSTALLATION AIR PURIFIERS AND SANITISERS  
FOR CEILING AND CONCEALED INSTALLATION AND FOR COMMERCIAL AND INDUSTRIAL APPLICATIONS

36



Exhibition halls and malls







## FAQ

### Are DEPURO PRO and DEPURO SKY purifiers effective against COVID-19?

According to the World Health Organization (WHO), most disease-causing pathogens are transmitted from person to person by air or by contact. Transmission by air is carried out through vectors such as droplets, of an average size greater than 5 microns, which can remain suspended in the air for a few minutes, and aerosols, between 2 and 5 microns, capable of floating for longer periods, according to their size and environmental conditions.

Another possible vector seems to be, according to some hypotheses still under investigation, the microparticulate (PM) present in the air.

The most recent studies conducted on the coronavirus SARS-COV-2, the cause of the COVID-19 pandemic, whose average size is between 0.1 and 0.16 microns, identify the main source of infection in airborne transmission\*. Droplets and aerosols produced by coughs, sneezing, breathing, as well as toilet flushes and some medical procedures, once released into the environment, before decaying, retain an infectious charge for several hours, contaminating in the meanwhile surfaces and objects and thus creating the conditions for the spread of the infection through contact with eyes, nose and mouth.

The HEPA H14 absolute filters on the DEPURO PRO and DEPURO SKY Range products are able to retain 99.995% of the particles present in the treated air with dimensions  $\leq 0.3$  microns, erecting an effective, albeit not absolute, barrier against the vectors through which the virus partially spreads. Therefore, the use of DEPURO PRO and DEPURO SKY purifiers makes it possible to reduce the concentration of the virus in the environment, limiting the risks of infection.

### Are DEPURO PRO EVO and DEPURO SKY EVO purifiers effective against COVID-19?

The HEPA H14 absolute filters on the DEPURO PRO and DEPURO SKY Range products are able to retain 99.995% of the particles present in the treated air with dimensions  $\leq 0.3$  microns, erecting an effective, albeit not absolute, barrier against the vectors through which the virus partially spreads.

Therefore, the use of DEPURO PRO and DEPURO SKY purifiers makes it possible to reduce the concentration of the virus in the environment, limiting the risks of infection.

The effectiveness of these VORTICE purifiers against pathogens, including the virus causing the COVID-19 pandemic, is further strengthened by the presence, in the EVO models, of a photocatalysis module featuring the Dust Free technology, whose effectiveness has been proved by tests performed at the Biomedical and Clinical Sciences Department "Luigi Sacco" of the University of the Studies of Milan.

### What is the filtering effectiveness of the DEPURO PRO and DEPURO SKY Range purifiers?

The purifiers of these two ranges are equipped with a multiple-stage filtering section, formed by ISO coarse 65% pre-filters (G4, according to the old classification) and ISO ePM1 70% pre-filters (F7, according to the old classification), able to remove up to 65% of PM10. They retain dust and macro impurities and thus protect the underlying HEPA H14 absolute filters, able to retain 99.995% of particles  $\leq 0.3$  micron in size, the most dangerous for health, given their ability to reach the pulmonary alveoli, the last offshoots of our respiratory system.

### Are DEPURO PRO and DEPURO SKY purifiers equipped with high performance HEPA 14 absolute filters?

Yes, all the filters that equip the purifiers of the DEPURO PRO and DEPURO SKY ranges are subjected to strict laboratory tests that evaluate their effectiveness and ensure the achievement of the nominal abatement capacity. The HEPA H14 absolute filters of every purifier of both ranges are supplied as fully protected and sealed units and are accompanied by a specific and unique certificate, which testifies to their effectiveness.

\*Source: Scientific and technical information on Coronavirus disease, COVID-19 (update; 4 April 2020) of the Spanish Ministry of Health, page 11, point 2.1.

### What is the maximum volume for which the DEPURO PRO and DEPURO SKY purifiers are effective?

The effectiveness of a purifier depends on the volume of the environment and the concentration of pollutants in it. The smaller the environment, and therefore the volume of air to be cleaned, the faster the purifying action will be.

Given the above, the maximum volume of the target environments of the DEPURO PRO range purifiers is respectively 150m<sup>3</sup> for the two 150 models and 300m<sup>3</sup> for the two 300 models, corresponding to surfaces of 50 m<sup>2</sup> and 100 m<sup>2</sup> respectively, in the hypothesis of ceilings 3m high.

As for the DEPURO SKY Range models, the maximum volume is, respectively, 900m<sup>3</sup> for the two DEPURO SKY models and 600m<sup>3</sup> for the two DEPURO SKY EASY models, corresponding to surfaces of 330m<sup>2</sup> and 265m<sup>2</sup> respectively, in the hypothesis of ceilings 3m high.

Of course, by leaving doors open, it is possible to benefit from the action of the single product in multiple rooms.

Further information can be obtained by writing to the VORTICE Presale Service at the address: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

### How can I optimise the effectiveness of DEPURO PRO and DEPURO SKY purifiers?

The effectiveness of a purifier depends, with the same construction and quality of the mounted filters, on the treated air flow rate: the greater the volume of air passing through the filters, the less time it takes to reduce the polluting charge present in the environment.

Therefore, **the best performance of DEPURO PRO and DEPURO SKY is obtained when their fan operates at the highest speed among those available**, compatibly with the acoustic comfort of those present (see the following point in this regard). To ensure adequate levels of environmental comfort, **it is advisable not to turn off the purifier when the air quality improves or the room is not occupied, but rather to reduce the fan speed to lower consumption and noise emissions while still reducing the pollutant rate.**

*The DEPURO PRO efficacy test, carried out by Eng. Benjamín Beltrán Bennasar (Senior Technical Chemical Engineer for Indoor Environmental Quality) and verified by the engineer Blai Carbonell i Rodríguez (Senior Technical Industrial Engineer for Indoor Environmental Quality) from the MON SOLAR INGENIEROS, S.L. office, is available upon request at the VORTICE Presale Service.*

### Are DEPURO PRO and DEPURO SKY purifiers quiet?

To be effective, a purifier must:

- be equipped with filters capable of effectively retaining pollutants;
- be designed and constructed so as to avoid leakage and thus ensure that all the treated air is effectively filtered;
- fit a fan powerful enough to treat an air flow rate suitable for the size of the environment to be purified, in order to ensure its effective purification.

All this being said, it follows that a purifier, to be truly effective, cannot be completely silent. Products advertised on the basis of this feature are often not very effective, either because they are equipped with inefficient filters, or because they are equipped with poorly performing fans.

The purifiers of the DEPURO PRO and DEPURO SKY ranges are equipped with EC fans whose speed is adjustable from 0 to 100%, so as to ensure the initial rapid reduction of the polluting charge present in the environment and the subsequent maintenance of adequate air quality levels to guarantee the health and comfort of the occupants, without causing excessive disturbance.

### Do DEPURO PRO and DEPURO SKY purifiers need maintenance?

The correct use of the purifiers of the DEPURO PRO and DEPURO SKY ranges does not require any intervention beyond the periodic replacement of the filters and of the photocatalysis module in the EVO models.



Do you need assistance on this product?

**CONTACT OUR CUSTOMER SERVICE**

ITALY: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com) / ABROAD: [export@vortice-italy.com](mailto:export@vortice-italy.com)



## VORTICE GROUP COMPANIES

### VORTICE S.P.A

Strada Cerca, 2  
Frazione di Zoate  
20067 Tribiano  
(Milan) Italy  
Tel. (+39) 02 906991  
Fax (+39) 02 90699625  
vortice.com

### VORTICE LIMITED

Beeches House  
Eastern Avenue  
Burton upon Trent  
DE13 0BB United Kingdom  
Tel. (+44) 1283-49.29.49  
Fax (+44) 1283-54.41.21  
vortice.ltd.uk

### VORTICE INDUSTRIAL S.R.L.

Via B. Brugnoli 3,  
37063 Isola della Scala  
(Verona) Italy  
Tel. (+39) 045 6631042  
Fax (+39) 045 6631039  
vorticeindustrial.com

### CASALS VENTILACIÓN AIR INDUSTRIAL S.L.

Ctra. Camprodon, s/n 17860  
Sant Joan de les Abadesses  
(Girona) Spain  
Tel. (+34) 972720150  
casals.com

### VORTICE LATAM S.A.

Bodega #6  
Zona Franca Este Alajuela,  
Alajuela 20101  
Costa Rica  
Tel. (+506) 2201 6934  
vortice-latam.com

### VORTICE VENTILATION SYSTEM

(Changzhou) Co.LTD  
No. 388 West Huanghe Road  
Building 19, Changzhou  
Post Code: 213000 China  
Tel. (+86) 0519 88990150  
Fax (+86) 0519 88990151  
vortice-china.com

## TOLL-FREE NUMBER

**800 555 777**

The descriptions and illustrations in this catalogue are intended to be indicative and not binding. Without prejudice to the essential characteristics of the products described and illustrated here, VORTICE reserves the right to make, at any time and without notice, any changes to parts, aesthetic details or supply of accessories to its products that are deemed to be appropriate for improvement or for any construction or commercial requirement.  
This printout completely cancels and replaces all previous ones.

