


MAINS
220-240V
~50-60Hz

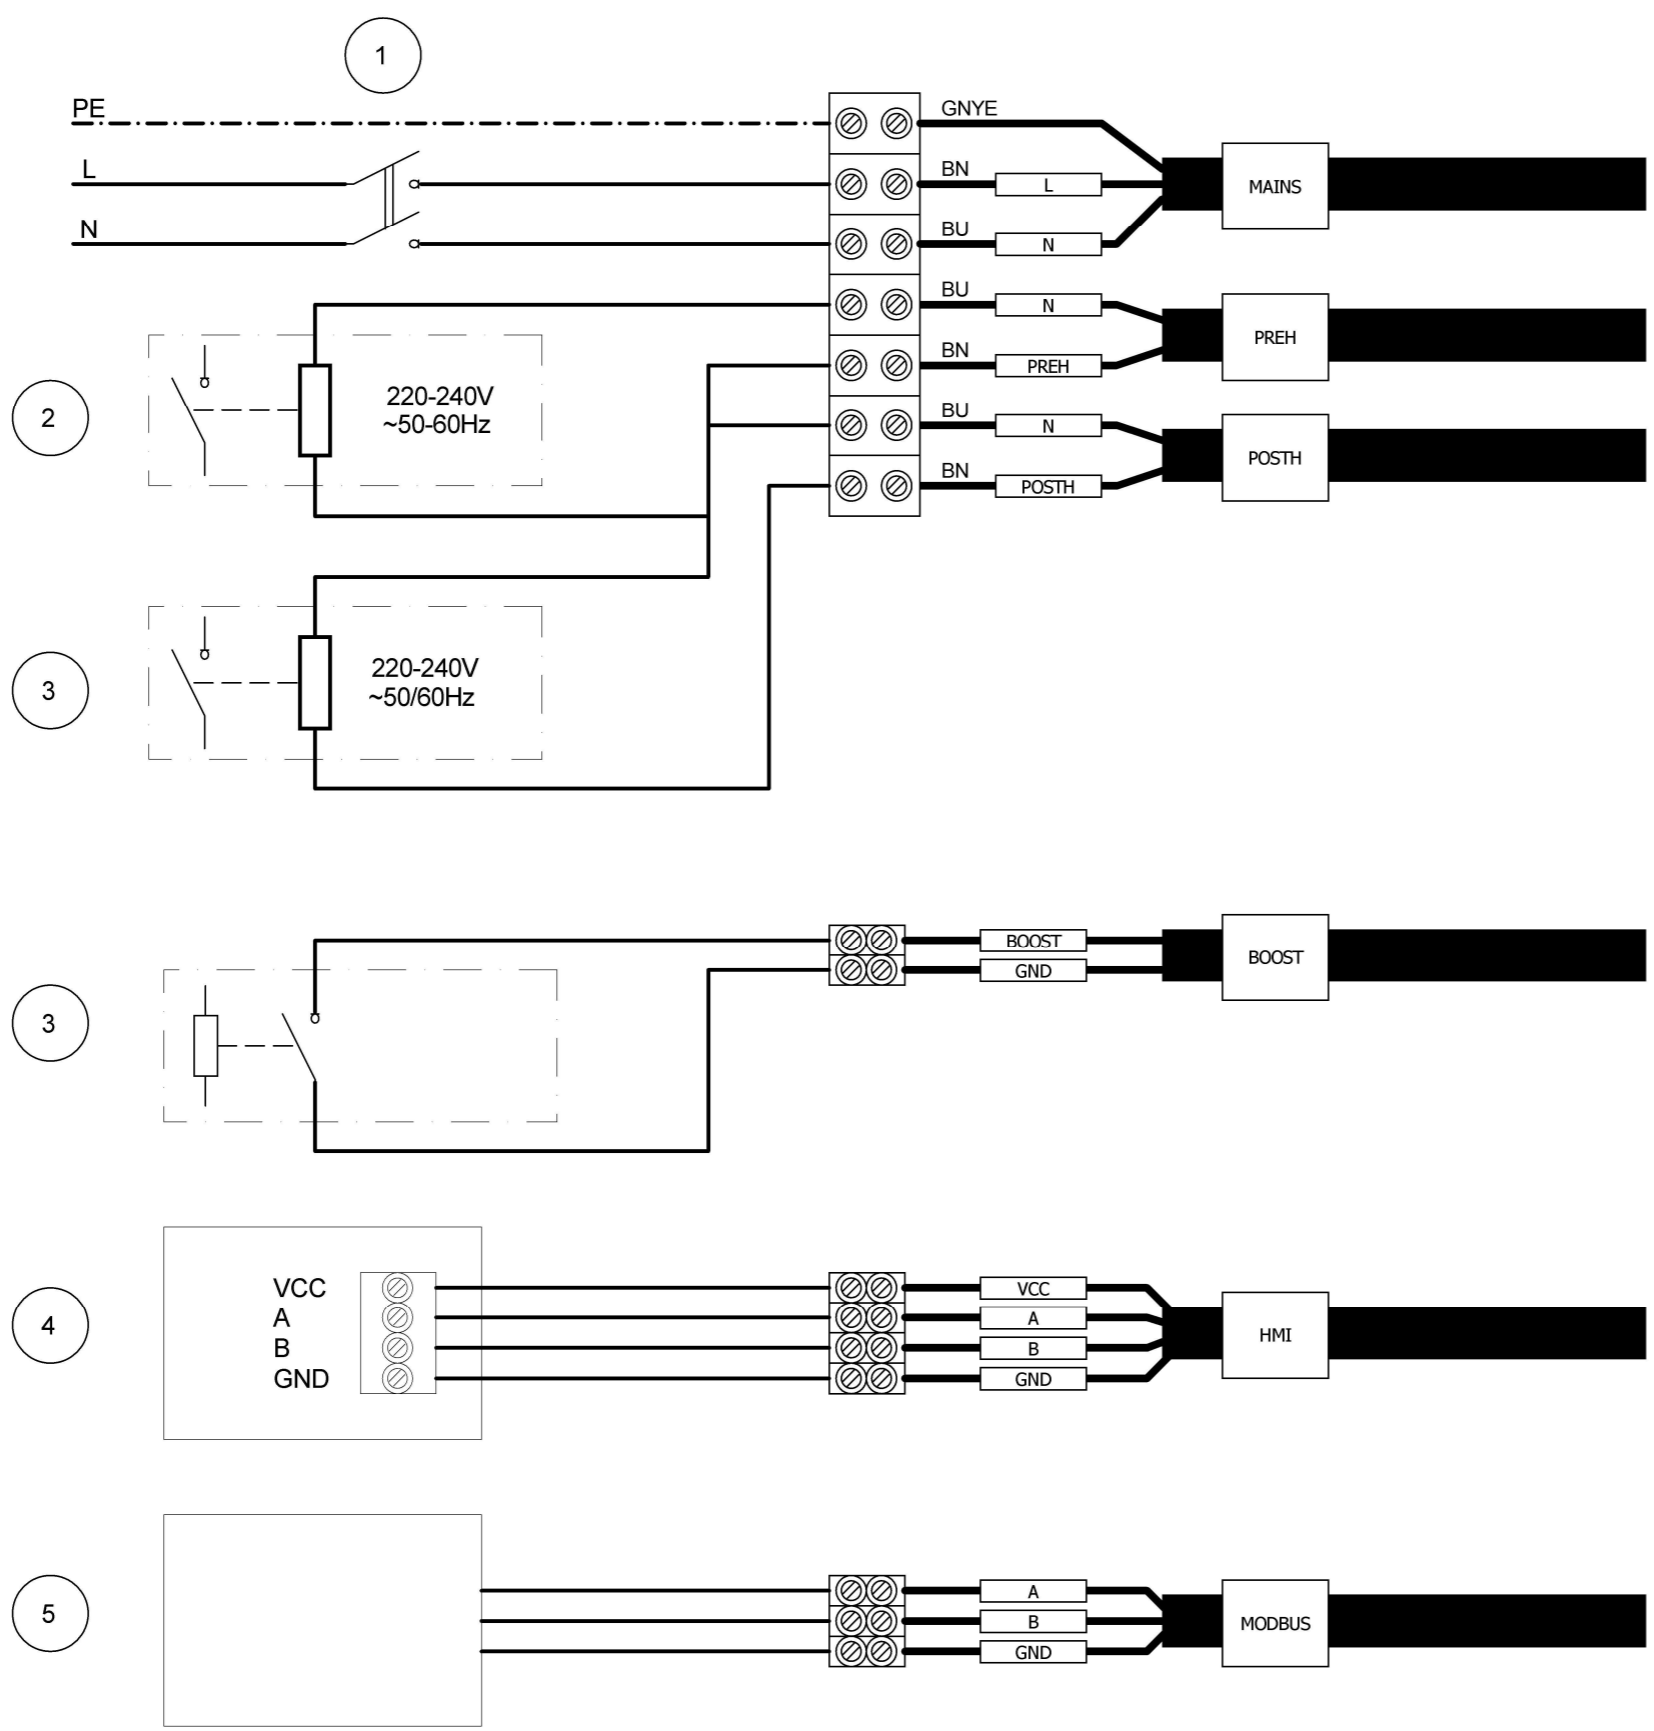

- 1 Mains 2 poles switch
- 2 Preheater
(remote 220-240Vac ~50/60Hz relay coil)
- 3 Postheater
(remote 220-240Vac ~50/60Hz relay coil)
- 4 Dry contact (remote switch / relay)
- 5 Remote HMI
- 6 Remote Modbus Master Unit

Wires color code
 BK=black
 BU=blu
 BN=brown
 GNYE=yellow/green
 RD=red
 WH=white
 YE=yellow

	Materiale	Colore	Nome Commerciale
	Trattamento superficiale / Termico	Rugosità generale	Codice fornitore
Data emissione revisione	Data: 29/11/2017 Disegn: RS/UT Controllo: Visto:	Fornitore	Volume [mm3] Peso [g] Densità [g/mm3]
Ninfeo N. 0xx/21	Quote senza indicazione di tolleranza secondo norma ISO 22768-1		Scala
Descrizione	Grado precisione ISO 2768-M		
Agg. mains values	Descrizione HR 300 NETI EXPORT PASSIVHAUS Wiring diagram		
Codice Grezzo	Disegno N. E960586A	1/1	
	Codice Finito 9.993.000.492		

This drawing is property of VORTICE ELETTROSOCIALI SpA. Without the written permission of VORTICE ELETTROSOCIALI SpA the drawing may not be used to construct the object represented, nor be shown to third parties or otherwise reproduced. VORTICE ELETTROSOCIALI S.p.A. will protect exclusivity rights under the law.