

# Technical Data Sheet

CODE 19221

## METAL DRY

Automatic and manual hand dryers




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	8,5	Shock resistance rating (IK)	10
Absorbed Power max (W)	1950	Voltage (V)	220-240
Frequency (Hz)	50/60	Weight (Kg)	7,2
Insulation Class	II°	Delivery max (l/s)	53
IP	X4	Delivery max (m <sup>3</sup> /h)	190
Motor Power (W)	140	Power in stand-by mode (W)	0,4737
		Sound pressure level Lp [dB (A)] 1m	69,8

### DIMENSIONS

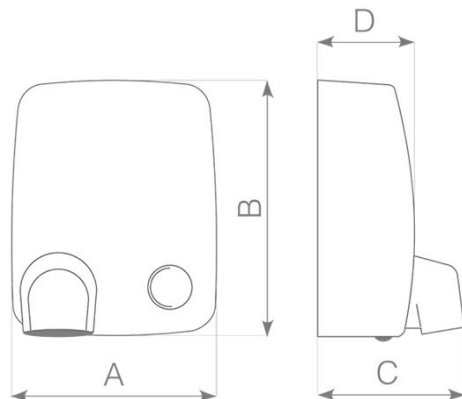

Size A (mm)	280
Size B (mm)	355
Size C (mm)	202
Size D (mm)	139

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 19221

## METAL DRY

Automatic and manual hand dryers



### DESCRIPTION

- Front cover made of pressure diecast aluminium with scratch-resistant white powder-coated finish, closure with vandal-proof screws.
- Plastic wall mounting flange (talc-filled PP).
- Nozzle rotatable through 360°, grille with scratch-resistant powder-coated finish, transparent protection.
- Scroll and motor mounting cowl moulded from ABS
- AC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 190 m3/h.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range 20"-60". Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- IMQ safety certification.

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)