

# Technical Data Sheet

CODE 45319

## VORT QBK POWER 15/15 1V 3

Belt driven cabinet fans



### Certifications


CE CE

EAC EAC

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	230/400
Motor IP protection	55	Delivery max (l/s)	2778
Nominal Current (A)	6,47	Delivery max (m³/h)	10000
Nominal Power (W)	3000	RPM max	960
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	78

### DIMENSIONS

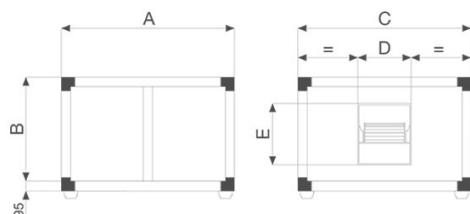

Size A (mm)	1040
Size B (mm)	1040
Size C (mm)	1040
Size D (mm)	470
Size E (mm)	405

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 45319

## VORT QBK POWER 15/15 1V 3



Belt driven cabinet fans

### DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 10,000 m<sup>3</sup>/h.

### ACCESSORIES



**QBK RRC  
POWER 15/15  
(TETTUCCIO)**

Code 24218



**QBK VCD  
POWER 15/15  
(SERRANDA+COMANDO)**

Code 24225



**QBK IG POWER  
15/15 (GRIGLIA  
RAZIONALE)**

Code 24233



**QBK SS POWER  
(MICRO)**

Code 24237



**QBK FS POWER  
15/15 (SEZIONE  
FILTRANTE)**

Code 24243

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)