

Technical Data Sheet

CODE 15115

TORRETTA TRM 10 E 4P

Centrifugal roof fans with horizontal discharge



Certifications


CE CE

EAC EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,50	Number of Poles	4
Absorbed Power max (W)	100	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	14,5
Insulation Class	I°	Delivery max (l/s)	306
Max ambient temperature for continuous operation (°C)	90	Delivery max (m³/h)	1100
Motor IP protection	55	Pressure max (mmH2O)	22
Nominal Diameter (mm)	200	Pressure max (Pa)	216
Number of Phases (Ph)	1	RPM	1400
		Sound Pressure level Lp [dB (A)] 3m	56

DIMENSIONS

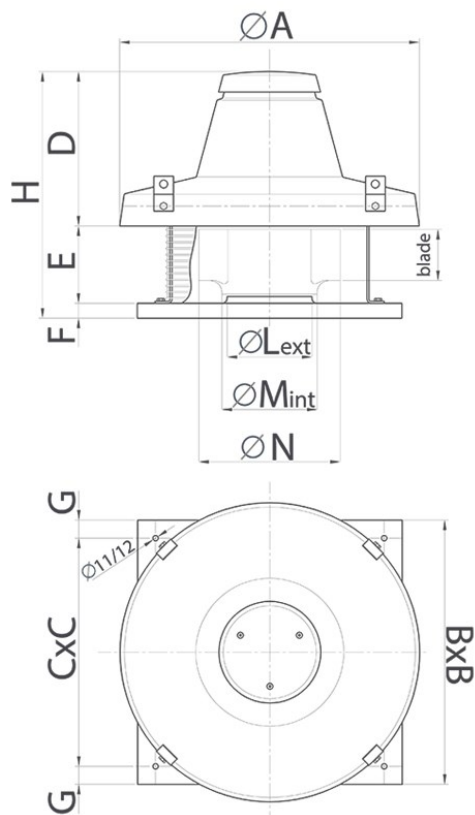

Size A (mm)	600
Size B (mm)	410
Size C (mm)	357
Size D (mm)	310
Size E (mm)	108
Size F (mm)	38
Size G (mm)	26,5
Size H (mm)	456
Size L (mm)	Ø 170
Size M (mm)	Ø
	187,5
Size N (mm)	Ø 283

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 15115

TORRETTA TRM 10 E 4P


Centrifugal roof fans with horizontal discharge



DESCRIPTION

- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved aluminium blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed single phase AC motor, insulation class F, with shaft turning in double shielded ball bearings.
- Maximum airflow: 1100 m³/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Equipped with capacitor to EN 60252-1 standard, IMQ certified.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.

CURVES

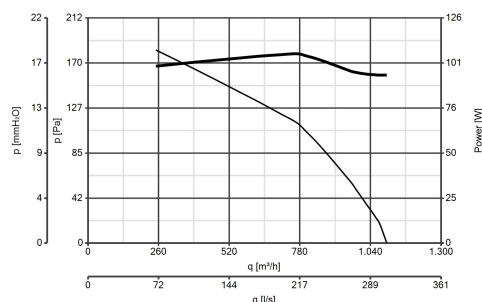

ACCESSORIES



IRM 30
Code 12921



IREM 3 CD
99250080
Code 12931




C 1.5
(COMANDO EL.
1.5 A)
Code 12966



TR-CU 10/15
(CONTROTELAIO



TR-B 10/15
(BOCCAGLIO



TR-G 10/15
(GRIGLIA DI
PROTEZIONE)



IREM INVERTER
4 M
Code 12815

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premeendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

