

# Technical Data Sheet

CODE 15355

## TORRETTA TRT 30 E 4P

Centrifugal roof fans with horizontal discharge




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,75	Number of Poles	4
Absorbed Power max (W)	400	Voltage (V)	380-415
Frequency (Hz)	50	Weight (Kg)	23
Insulation Class	I°	Delivery max (l/s)	889
Max ambient temperature for continuous operation (°C)	90	Delivery max (m³/h)	3200
Motor IP protection	55	Pressure max (mmH2O)	46
Nominal Diameter (mm)	250	Pressure max (Pa)	451
Number of Phases (Ph)	3	RPM	1400
		Sound Pressure level Lp [dB (A)] 3m	67

### DIMENSIONS

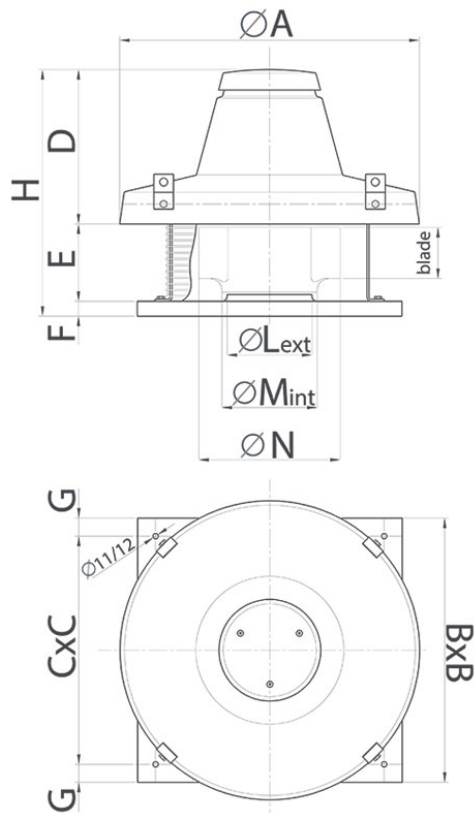

Size A (mm)	780
Size B (mm)	550
Size C (mm)	500
Size D (mm)	398
Size E (mm)	146
Size F (mm)	38
Size G (mm)	25
Size H (mm)	582
Size L (mm)	244
Size M (mm)	265,5
Size N (mm)	404

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 15355

## TORRETTA TRT 30 E 4P

Centrifugal roof fans with horizontal discharge



### DESCRIPTION


- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved aluminium blades, dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed single phase AC motor, insulation class F, with shaft turning in double shielded ball bearings.
- Maximum airflow: 3200 m<sup>3</sup>/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.

### ACCESSORIES



#### IRT 35

Code 12924




#### TR-CU 20/30/50 (CONTROTELAIO DI BASE U)

Code 22512



#### TR-B 20/30/50 (BOCCAGLIO ASPIRAZIONE)

Code 22610



#### TR-G 20/30/50 (GRIGLIA DI PROTEZIONE)

Code 22710



#### TR-CVT (COMMUTATORE VELOCITA' TRIF.)

Code 22910



#### IRET INVERTER 2,5 M

Code 12816

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com