

Technical Data Sheet

CODE 61460

NORDIK 1S 160/60 SENZA G.C.



Ceiling fans with or without light




Certifications



TECHNICAL AND PERFORMANCE DATA

| | | | |
|--------------------------|---------|---------------------------------------|--------|
| Absorbed Current max (A) | 0,34 | Airflow speed at max speed (m/s) | 1,34 |
| Absorbed Power max (W) | 70 | Delivery max (m ³ /h) | 14000 |
| Blades diameter | 160 | Delivery max (m ³ /min) | 233,33 |
| Frequency (Hz) | 50 | giri_minuto | 215 |
| Insulation Class | I° | RPM | 215 |
| Voltage (V) | 220-240 | Service value (m ³ /min)/W | 3,333 |
| Weight (Kg) | 6,6 | Sound power level Lw [dB(A)] | 55,5 |

DIMENSIONS

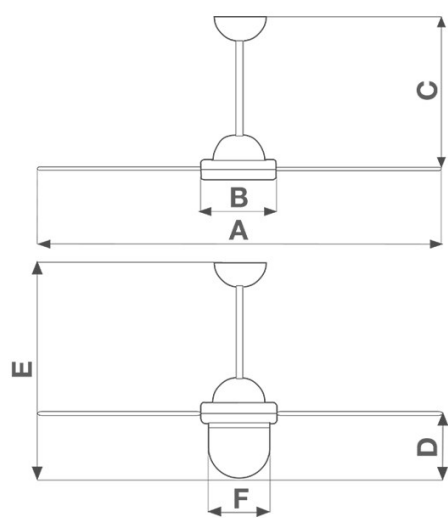

| | |
|-------------|--------|
| Size A (mm) | ∅ 1524 |
| Size B (mm) | ∅ 230 |
| Size C (mm) | 495 |

con DECOR LIGHT KIT

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 61460

NORDIK 1S 160/60 SENZA G.C.



Ceiling fans with or without light

DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1600 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow: 14,000 m³/h.
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Speed selectable by way of control units or Telenordik 5T remote control (optional)

ACCESSORIES



SCNR5 UNIF.X NK SOFFITTO

Code 12955



ASTA NK 200 BIANCA

Code 22030



ASTA NK 275 BIANCA

Code 22034



ASTA NK 350 BIANCA

Code 22040



ASTA NK 500 BIANCA

Code 22052



ASTA NK 750 BIANCA

Code 22072



ASTA NK 1000 BIANCA

Code 22075



TELENORDIK 5T

Code 22387



KIT SCB (TRASF.E.C.)

Code 22481



KIT SCB5 (TRASF.5 V.)

Code 22483



C 2.5 (COMANDO EL. 2.5 A)

Code 12967

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com





SET PALE
160/60 DESIGN
BIANCO INT
Code 22644



SC 503 B
Code 12801



SC 503 N
Code 12802



SC EXT B
Code 12803



PSC-W
Code 22462



PSC-B
Code 22463



SCI503
Code 22461



VORT DELTA T
Code 13039